



***East Central Intergovernmental
Association EPA Brownfield RLF
Cleanup Project: BF97764501 &
BIL96709001***

***Former YMCA Building
480 South 3rd Street
Clinton, IA 52732***

Health and Safety Plan

Prepared for:
***East Central Intergovernmental Association
7300 Commerce Park
Dubuque, Iowa 52002***

***City of Clinton
611 South 3rd Street
Clinton, Iowa 52732***

Prepared by:
**Impact7G, Inc.
8951 Windsor Parkway
Johnston, IA 50131
www.impact7g.com**

Date:
5/17/2024

Emergency Contact Information

Site Name: *Former YMCA Building*

Specific Location: *480 South 3^d Street, Clinton, Iowa 52732*

Table 1. Emergency Response Telephone Roster

Contact	Name	Office phone #	Mobile phone #
Local Fire Department	Joel Atkinson, Fire Chief	563.242.0125	
Local Hospital	MercyOne	563.244.5555	
Local Police	Kevin Gyrion, Chief of Police	563.243.1455	
Spill Notification	Iowa DNR	515.725-8694	
Impact7G Principal	Mike Fisher	515.473.6256	319.551.1579
Impact7G Project Manager	Jon Reis	515.473.6256	515.231.3719
Impact7G Designated Site Supervisor	Leon Johnson	515.473.6256	515.201.8215
Impact7G Health and Safety Coordinator	Matt Deutsch	515.473.6256	515.802.7466
Client (ECIA) Contact	Dawn Danielson		563-580-1976
Client (City of Clinton) Contact	Tammy Johnson	563-594-6730	563-212-2394
Contractor:			
(Other):			
Poison Control		800-222-1222	

Potential Chemicals of Concern:

Potential contaminants that may be encountered during site operations include asbestos, lead (from lead-based paint), and mold. There is potential for asbestos fibers and lead in the air above applicable Permissible Exposure Limits (PELs) or Threshold Limit Values (TLVs) during the course of this cleanup project.

Route to Hospital:

Hospital name: *MercyOne Clinton Medical Center*

Hospital Address: *1410 N 4th Street, Clinton, Iowa 52732*

Hospital Phone Number: *1 + 563.244.5555*

Description of Route to Hospital

Describe Route to Hospital with Both Turn by Turn and Google maps:


Work Site Name: *Former YMCA Building*

Work Site Address: *480 South 3^d Street, Clinton, Iowa 52732*

- *Head toward 4th Ave S on S 3^d St. (322 feet)*
- *Turn right onto 4th Ave S. (0.1 mi)*
- *Turn left onto S 2nd Street (US-67) (1.2 mi)*
- *Turn left onto 14th Ave N toward Hospital (0.3)*
- *Turn right (187 feet)*

End: MercyOne Clinton Medical Center is straight ahead.

Example Map to Hospital:

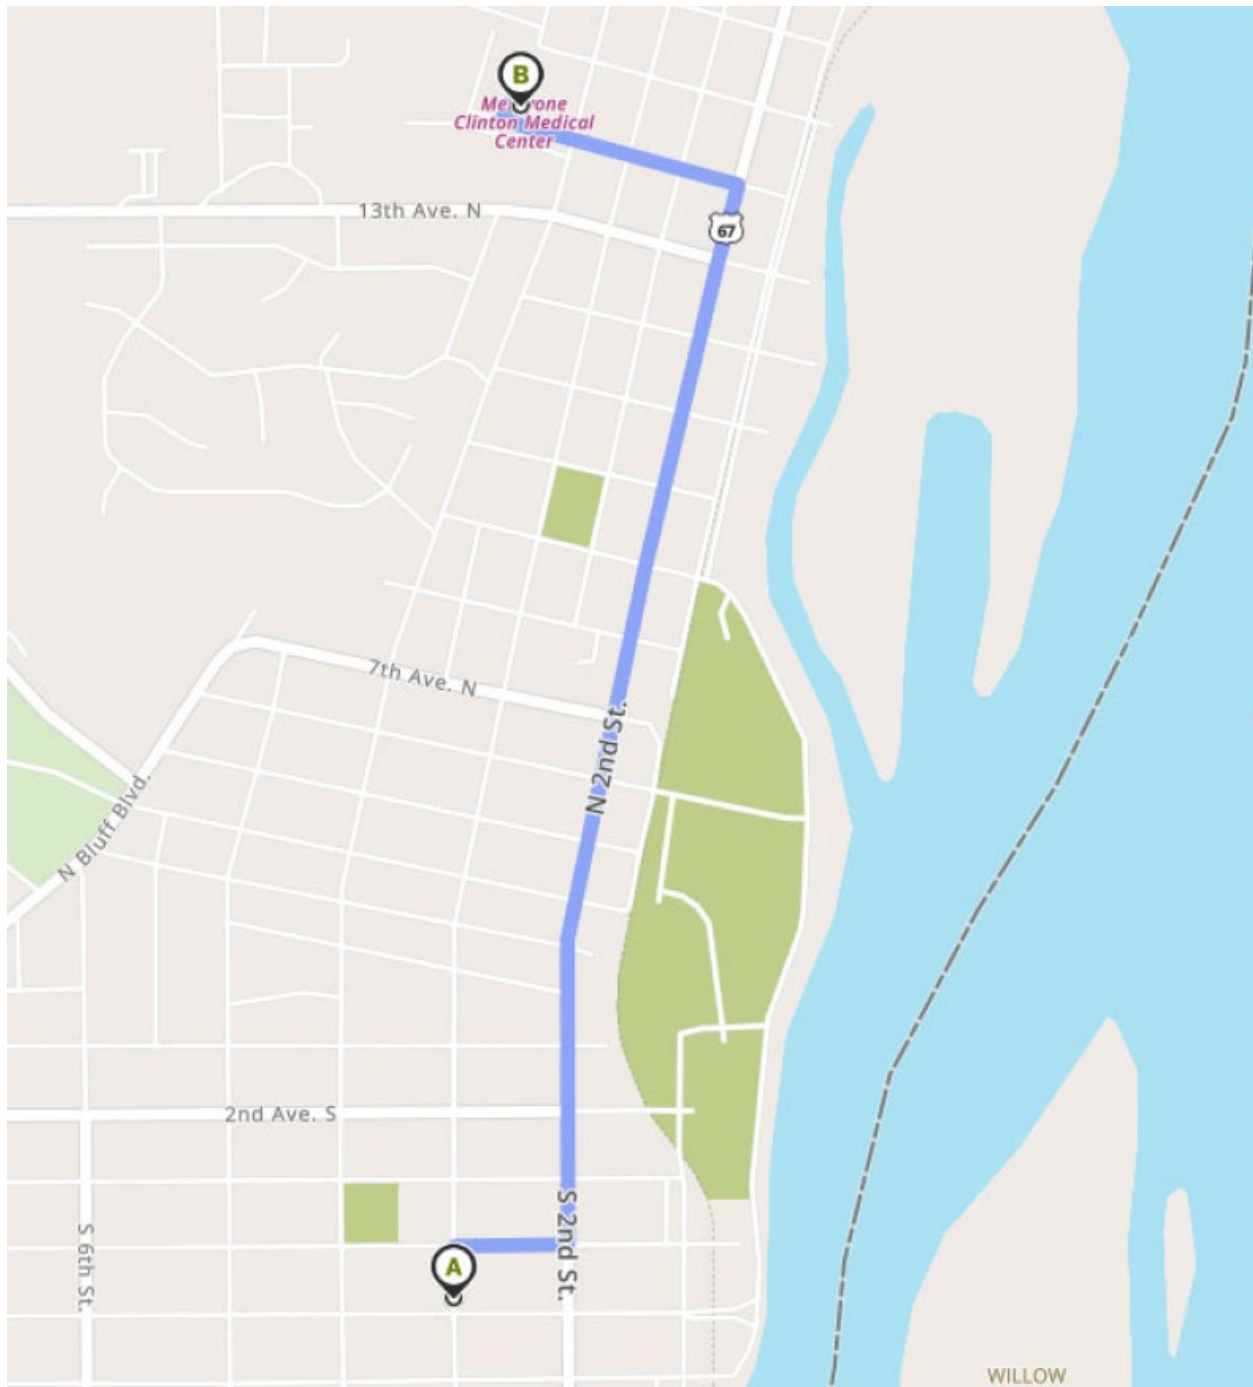

Contents

	Page
Emergency Contact Information	ii
Route to Hospital:	iii
Health & Safety Plan Review and Approval:	vii
1 Introduction	1
1.1 Site Description	1
1.2 Specific Work Activities	1
1.3 Site Safety Requirements	2
2 Identification of Key Health and Safety Personnel	3
2.1 Principal in Charge/Project Manager	3
2.2 Health and Safety Representative	3
2.3 Designated Site Supervisor	3
2.4 Project Personnel	3
3 Medical Surveillance Requirements	5
4 Employee Training Requirements	6
5 Hazard Evaluation	7
5.1 Specific Chemicals of Concern	8
5.2 Physical Hazards	8
5.3 Biological Hazards	9
5.4 Other Site Specific Hazards	9
6 Hazard Controls	10
6.1 General Subsurface Clearance Requirements	11
6.2 Specific Subsurface Clearance (SSC) Procedures	12
6.2.1 Historical Site Information Review	13
6.2.2 Plot Plan	13
6.2.3 Pre-Marking Ground Disturbance Locations	13
6.2.4 Line Location Services	13
6.2.5 Site Walkover-Visual Indicators	13
6.2.6 Utility Mark-out	14
6.2.7 Clearance of Ground Disturbance Locations & Critical Zones:	15
6.2.8 Overhead Lines	15
7 Personal Protective Equipment	16
8 Air Monitoring/Sampling Procedures	17
8.1 Action Level Guidance	18
8.2 Odors	18
8.3 Dusts	18
9 Decontamination	19
9.1 Sampling and Construction Equipment Decontamination	19

9.2	Personnel Decontamination	19
9.3	Investigation Derived Material Disposal	19
10	Site Communications	20
11	Emergency Response Plan (ERP)	21
11.1	Stop Work Authority	21
11.2	General Emergency guidelines are as follows:	21
11.2.1	First Aid Procedures	21
11.2.2	Fire Procedures	21
11.2.3	Spill Procedures	22
11.2.4	Uncovering an Underground Service (Intact)	22
11.2.5	Striking an Underground Electrical/Telecom Cable	22
11.2.6	Striking a Pressurized Gas Pipeline	23
11.2.7	Striking a Pressurized Water Main	23
11.3	Incident Reporting	23
12	Health and Safety Plan Field Team Signatures	25
13	Safety Meeting Checklist	26

List of Tables

Table 1:	Emergency Response Telephone Roster
Table 2:	Impact7G Personnel Contact Information
Table 3:	Contractor/Subcontractor Contact Information
Table 4:	Project Hazard Analysis
Table 5:	Chemicals of Concern
Table 6:	Biological and Physical Hazards
Table 7:	Summary of Hazards
Table 8:	Hazard/Risk Matrix Decision Table
Table 9:	Subsurface Clearance (SSC) Actions
Table 10:	Task-Specific PPE
Table 11:	Personal Protective Equipment and Supplies Specific PPE
Table 12:	Monitoring Devices Available
Table 13:	Required Monitoring
Table 14:	Action Levels for Commonly Encountered Compounds


List of Appendices

Appendix A:	Chemical Information and Material Safety Data Sheets
Appendix B:	Control Mechanisms
Appendix C:	Subsurface Clearance Field Checklist
Appendix D:	First Aid Guidance
Appendix E:	Emergency Information

Health & Safety Plan Review and Approval:


By signing below, it is acknowledged that this HASP identifies the activities that are anticipated to be performed in the field. In addition, this HASP identifies the personal protective and monitoring equipment that may be necessary to be on site and be available for use. It is also understood that the provisions of this HASP will be updated if there is a change of a task and/or the addition of tasks and will be approved by the individuals listed below or their designee.

Mike Fisher
Principal-in-Charge


Signature

5/22/24
Date

Jon Reis
Project Manager


Signature

5/22/24
Date

Matt Deutsch CSP, CHMM
Health & Safety Representative


Signature


5/22/24
Date

Leon Johnson
Designated Site Supervisor


Signature


5/22/24
Date

Jon Reis
Designated HASP Preparer


Signature

5/22/24
Date

Matt Deutsch CSP, CHMM
Designated HASP Reviewer


Signature

5/22/24
Date

This form **MUST** be signed prior to starting the on-site work. In addition, a copy of this form should be returned to the office Health and Safety Coordinator prior to leaving for the field. After completion of the project, the original signed HASP must be retained in the project file.

Author's Initials: JHR

1 Introduction

This HASP was prepared to inform all Impact7G personnel of known or reasonably anticipated potential hazards and safety concerns at ***the former YMCA Building***. All personnel participating in field activities must be trained in the general and specific hazards unique to the job they are performing and, if applicable, meet recommended medical examination and/or training requirements. All Impact7G employees shall follow the guidelines, rules, and procedures contained in this site-specific HASP. Impact7G personnel shall contact the Project Manager (PM) if unexpected conditions are encountered at the site, including but not limited to new processes; changes in operation, products, services; additional or changes in the chemicals of concern; and/or unsafe conditions are encountered which were not previously addressed in this HASP.

Each contractor, subcontractor, and visitor shall be expected to review and understand the hazards, risks, and control methods (including emergency procedures) as outlined in this HASP, and sign off on the HASP. This can be accomplished either during the project planning stage or during the first safety briefing on site. However, contractors and subcontractors will be required to prepare their own HASP to address site safety and work hazards associated with their proposed site activities prior to mobilization to the site. In addition, each subcontractor will be required to provide Impact7G with their site-specific HASP, and communicate the types of hazards and control methods associated with their activities to Impact7G during the first safety briefing on site and as conditions change. Relevant Contractor information regarding the identification of hazards and appropriate control strategies for the hazards for their particular job tasks should also be presented and a site-specific HASP should be available for review by all parties. Each contractor or subcontractor must assume direct responsibility for its own employees' health and safety.

Copies of the HASPs will be kept on-site for review and reference during all site activities. Upon completion of the project, the finalized and signed copy of the HASP will be placed in the project file.

1.1 Site Description

The site includes the original 1905 buildings associated with the former YMCA along with a 1962 addition and a 1980 addition. The Client is requesting asbestos abatement activities be completed to remove the health hazard and prepare the property for redevelopment. Any painted surfaces disturbed during asbestos abatement will be presumed to be lead-based paint and treated as such. Identified mold will also be remediated to remove the health hazard.

Project work at the former YMCA will consist of three phases: Phase 1a, Phase 1b, and Phase 2.

Phase 1a

The initial phase of the project will consist of ACM abatement of the three-story original 1905 building (Building A) and Building C1, and separating Building A from the remainder of the structure. To accomplish the separation, Building B1 will be removed entirely. The portion of Building C1 immediately adjacent to Building A will be removed following ACM abatement. As Building B1 is not structurally sound, all debris will be treated as ACM and removed and disposed of as RACM.

Phase 1b

Following ACM abatement and prior to redevelopment, mold remediation will occur in Building A. Mold remediation will not occur immediately as there is no electricity to Building A and water intrusion from the remainder of the structure is a problem. Without the ability to control moisture and temperature in Building A, it would be difficult to limit re-growth of mold if mold remediation was conducted concurrently with asbestos abatement.

Phase 2

The remaining structure (Buildings B2, C2, and C3 and a portion of Building C1) will be removed. As Building C1 will have been abated, debris can be removed and disposed of as general construction debris. Since Buildings Bs, C2, and C3 are not structurally sound, all debris will be treated as ACM and removed and disposed of as RACM.

1.2 Specific Work Activities

The field activities currently underway or planned for the immediate future include the following work activities or tasks:

- *Task 1 – Impact7G will conduct project observation of asbestos abatement at the site.*
- *Task 2 – Impact7G will confirm mold has been physically removed from the site.*

Each of these Tasks are further described as follows:

Task 1 – Asbestos Abatement Observation

Impact7G personnel will provide project observation periodically during asbestos abatement. This task includes observing abatement, monitoring work progress, and collecting air samples to document exposure to asbestos fibers from the abatement. Impact7G will also collect final clearance air samples at the completion of asbestos removal and passing of a visual inspection.

Task 2 – Mold Remediation Confirmation

Impact7G personnel conduct a visual clearance inspection following mold remediation to document removal of the mold.

1.3 Site Safety Requirements

Impact7G personnel will stay out of containment areas unless absolutely necessary for the completion of the project. Although entry of these areas is not expected to be required until asbestos abatement and mold remediation has been completed, any Impact7G field staff entering containment areas must have a current HAZWOPER certification, respirator fit test, and medical monitoring approval (e.g. "Site" training classification), and must wear level C PPE including a half-face air purifying respirator with appropriate P100-rated cartridges for protection from dust, as detailed in Section 7. Impact7G personnel will stay at least 25-30 feet away from large machinery wherever possible. When approaching large machinery, personnel will always make eye contact with the operator before approaching. In addition to any PPE required by the facility, Impact7G personnel will also wear a high-visibility reflective vest at all times when in the vicinity of large machinery. Impact7G employees will not enter confined space areas.

DRAFT

2 Identification of Key Health and Safety Personnel

An efficient on-site operation requires that all key personnel be identified and that their roles and responsibilities be clearly defined. Below is a discussion of the management structure for this project.

2.1 Principal in Charge/Project Manager

Responsibilities include overall coordination of site activities. The Principal in Charge (PIC) and the project manager (PM) have overall accountability and responsibility for the safety of operations and the health and safety of all personnel.

2.2 Health and Safety Representative

The local Health and Safety Representative (HSR) is a resource for the development of the site-specific HASP and will be consulted on all related health and safety issues that arise in the field, including any changes in the scope of work. The Impact7G Health and Safety Representative will make all final decisions regarding questions on the HASP.

2.3 Designated Site Supervisor

The site supervisor is responsible for field-related activities under the direction of the PM and for maintaining field operations in accordance with project requirements. This person is responsible for enforcing daily implementation of the HASP and resolving health and safety issues. In addition, this person will:

- Establish and ensure maintenance of site work zones.
- Monitor the work area and personal breathing zone and ensure compliance of workers relative to pre-established personal protection levels.
- Evaluate site conditions (i.e., weather, chemical, physical) and recommend any modifications to existing levels of protection.
- Ensure that daily safety briefings are conducted and documented in this HASP (see Sections 12 and 13) or in the field logbook.
- Initiate emergency response procedures with immediate communication to the project manager.
- Exercise stop-work authority in the event of imminent danger to project personnel.
- Notify PM of any noncompliance and/or unsafe conditions.
- Conduct regular inspections to determine the effectiveness of the HASP.

2.4 Project Personnel

Project personnel involved in field activities are responsible for:

- Taking all reasonable precautions to prevent injury to themselves and fellow employees.
- Conducting only those tasks that they believe they can do safely.

- Reporting all occurrences and/or unsafe conditions to the supervisor and/or project manager.

Further, any person working on-site has the authority to **stop work** if any operation threatens the health and safety of on-site workers or the surrounding community. In the event that such a situation occurs, the Site Supervisor shall be notified immediately. Impact7G's Site Supervisor will update the Impact7G PIC/PM on all project-related health and safety issues as they arise.

Table 2: Impact7G Personnel Contact Information

Company/Title	Personnel	Office	Cell
Impact7G Principal in Charge	Mike Fisher	515.473.6256	319.551.1579
Impact7G Project Manager	Jon Reis	515.473.6256	515.231.3719
Impact7G Corporate Health and Safety Director	Matt Deutsch	515.473.6256	515.802.7466
Impact7G Project Health and Safety Coordinator	Matt Deutsch	515.473.6256	515.802.7466
Impact7G Designated Site Supervisor	Leon Johnson	515.473.6256	515.201.8215
Client (ECIA) Contact	Dawn Danielson		563.580.1976
Client (City of Clinton) Contact	Tammy Johnson	563-594-6730	563.212.2394

Table 3: Contractor/Subcontractor Contact Information

Company/Title	Personnel	Office	Cell

3 Medical Surveillance Requirements

Surface and air contamination may be encountered during the course of this investigation. All Impact7G personnel participating in this project shall be enrolled in a health-monitoring program in accordance with the provisions of OSHA 29 CFR 1910.134 and 29 CFR 1926.62. Each project participant shall be certified by a Doctor of Medicine as fit for respirator and semi-permeable/impermeable protective equipment use. All personnel shall have received an environmental physical examination within one year prior to the start of project activities. A consulting physician will determine the content of the physical examinations.

Follow-up medical examinations will also be provided in the event of job site injury or unprotected exposure to contaminants in excess of eight-hour time-weighted average permissible exposure limits. The Impact7G Corporate Health & Safety Director will maintain certificates of medical examinations.

4 Employee Training Requirements

All Impact7G personnel participating in this project must have completed 40-hour Hazardous Waste Operations (HAZWOPER) Training and at least three days of supervised field activity per requirements of OSHA 29 CFR 1910.120. In addition, a current 8-hour annual refresher-training will be required for all field personnel. The Impact7G Corporate Health & Safety Director will maintain training certificates for all project personnel at the Johnston Office. The Site Supervisor or other Impact7G site participant shall maintain a current certificate in basic First Aid training as provided by the American Red Cross. First Aid Guidance is included in Appendix D.

Per the scope of this project, Impact7G personnel performing asbestos abatement oversight will maintain a State of Iowa Contractor/Supervisor license. Copies of licenses will be kept in the project folder within the field vehicle, on each person, or be available digitally during the project.

Prior to the start of site activities, all Impact7G project personnel will participate in a pre-project safety and health briefing outlining the contents of this HASP. The personnel responsible for project safety and health will be addressed, as will site history, scope of work, site control measures, emergency procedures, and site communications. Daily “tailgate” safety and health briefings will be presented by the Site Supervisor at the start of each workday. Records of safety and health briefings will be maintained for the duration of this project.

Subcontractors under the direction of Impact7G are not anticipated to be necessary as part of this project.

5 Hazard Evaluation

The Project Hazard Analysis below identifies the hazards anticipated to be encountered by the project team based on the tasks presented in Section 1.2.

Table 4: Project Hazard Analysis

Chemical Hazards Present: <input type="checkbox"/> None	<input type="checkbox"/> Flammable/combustible <input type="checkbox"/> Compressed gas <input type="checkbox"/> Explosive <input type="checkbox"/> Organic peroxide <input type="checkbox"/> Oxidizer <input type="checkbox"/> Water-reactive <input type="checkbox"/> Unstable reactive <input checked="" type="checkbox"/> Dust/Fumes/Particulates	<input type="checkbox"/> Corrosive <input type="checkbox"/> Toxic <input type="checkbox"/> Highly Toxic <input type="checkbox"/> Irritant <input type="checkbox"/> Sensitizer <input type="checkbox"/> Carcinogen <input type="checkbox"/> Mutagen <input type="checkbox"/> Other:
Physical Hazards Present: <input type="checkbox"/> None	<input checked="" type="checkbox"/> Heat <input checked="" type="checkbox"/> Cold <input checked="" type="checkbox"/> Walking/working surfaces <input type="checkbox"/> Visible Dust <input checked="" type="checkbox"/> Traffic/Vehicles <input checked="" type="checkbox"/> Noise <input type="checkbox"/> Other:	<input type="checkbox"/> Ionizing radiation <input type="checkbox"/> Non-ionizing radiation <input type="checkbox"/> Electricity <input checked="" type="checkbox"/> Severe Weather <input checked="" type="checkbox"/> Poor lighting <input checked="" type="checkbox"/> Overhead Hazards
Impact7G Instrument/Equipment Hazards Present: <input type="checkbox"/> None	<input checked="" type="checkbox"/> Heavy machinery/ Drill Rigs <input type="checkbox"/> Trenching/excavation <input type="checkbox"/> Docks-marine operations <input type="checkbox"/> Docks-loading <input type="checkbox"/> Drilling <input type="checkbox"/> Forklifts <input type="checkbox"/> Operations on Water <input checked="" type="checkbox"/> Elevated heights (includes fall protection) <input type="checkbox"/> Overhead/Underground utilities <input type="checkbox"/> Confined spaces <input type="checkbox"/> Power tools	<input type="checkbox"/> Cranes/Hoists/Rigging <input checked="" type="checkbox"/> Ladders <input type="checkbox"/> Scaffolding <input type="checkbox"/> Manlifts <input type="checkbox"/> Gas cylinders <input type="checkbox"/> Roadway work <input type="checkbox"/> Railroad work <input type="checkbox"/> Energized equipment (LO/TO) <input type="checkbox"/> Pressurized equipment (LO/TO) <input type="checkbox"/> Drums and containers <input type="checkbox"/> Others:
Biological Hazards Present: <input checked="" type="checkbox"/> None	<input type="checkbox"/> Animal/human fluids or blood <input type="checkbox"/> Animal/human tissue(s) <input type="checkbox"/> Poisonous/irritating plants <input type="checkbox"/> Other:	<input type="checkbox"/> Contaminated needles <input type="checkbox"/> Live bacterial cultures <input type="checkbox"/> Insects/rodents/snakes <input type="checkbox"/> Other:
Ergonomics Hazards Present: <input checked="" type="checkbox"/> None	<input type="checkbox"/> Repetitive motion <input type="checkbox"/> Awkward position <input type="checkbox"/> Heavy Lifting <input type="checkbox"/> Frequent Lifting	<input type="checkbox"/> Limited movement <input type="checkbox"/> Forceful exertions <input type="checkbox"/> Vibration <input type="checkbox"/> Other:
Personal Safety/Security: <input type="checkbox"/> None	<input checked="" type="checkbox"/> Personal safety <input checked="" type="checkbox"/> Security issue <input type="checkbox"/> Project site in an isolated area <input checked="" type="checkbox"/> Employees working alone <input checked="" type="checkbox"/> Wild/Feral Animals	<input type="checkbox"/> Employees working early/late <input type="checkbox"/> Potentially dangerous wildlife <input type="checkbox"/> Guard or stray dogs in area <input type="checkbox"/> No/limited cell phone service <input type="checkbox"/> Other:

5.1 Specific Chemicals of Concern

The chemicals listed in the table below include the identification of chemical contaminants known and/or suspected of being present on-site, the affected media, known concentrations (if applicable), the Permissible Exposure Limit (PEL) or Threshold Limit Value (TLV), and the Action Level (i.e., 50% of the PEL/TLV). This information will be inserted into Table 5 below. In addition, Appendix A contains specific hazardous property information for commonly encountered chemicals although a Material Safety Data Sheet (MSDS) (or equivalent) will also be included in Appendix A.

Table 5: Chemicals of Concern

Chemical	Environmental Media ¹	Highest Measured Concentration	PEL/TLV ²
Asbestos	Air / Building Components, unlikely to exceed limits during sampling using appropriate sampling procedures.		1 fiber/cc PEL-TWA OSHA
Lead (from Lead-Based Paint)	Air or Surface / Building Components		50 µg/m ³ – 8-hr TWA OSHA PEL 30 µg/m ³ – OSHA Action Level
Notes: ¹ Codes for environmental media: SL =Sludge; GW =Ground Water; SW =Surface Water; LW =Liquid Waste; SO =Soil; A =Air; OTH = Other (Specify) ² PEL: Permissible Exposure Limit / TLV: Threshold Limit Value, use appropriate PEL which would be country or state specific or if one is not available may be from a recognized source. mg/m ³ : milligrams per cubic meter mg/kg: milligrams per kilogram ppm: Parts per million %: Minimum percent allowed for personal entry into a space			

5.2 Physical Hazards

The potential physical hazards of concern anticipated during site work are listed in Tables 4 and 6. Personnel should be aware that as personal protective equipment increases, dexterity, and visibility may be impacted and performing some tasks may be more difficult.

At any site, the potential exists to encounter unknown materials such as sharp or jagged debris, broken glass, or rusty metal which can pose puncture and potential laceration hazards.

Physical hazard exposures were estimated using process knowledge and experience from similar projects.

5.3 Biological Hazards

Surface biological hazards such as disease-causing microorganisms (bacteria, fungus, viruses) are expected to exist at the site. Disease-carrying, biting insects could be encountered on-site. Rodents, wild dogs, raccoons, and other wild animals, which could bite or carry disease, are not anticipated at the project location.

5.4 Other Site Specific Hazards

Tailgate safety meetings will include a discussion of other possible site-specific safety hazards, and will address emergency procedures for evacuation, notification of emergency response agencies, and assembly checkpoints.

Table 6: Biological and Physical Hazards

Name of Physical Hazard	Source	Exposure Level/Potential	Exposure Limit
Utilities (elect., gas, water, etc.) Overhead/Underground	Operations	Unlikely	N/A
Other (Please Specify)	Unstable portions of building	Likely	N/A
Other (Please Specify)	Uneven surface	Likely	N/A
Other (Please Specify)	Sharp Objects	Likely	N/A
Electrical	Operations	Unlikely	N/A
Heat (Ambient)	Operations	Unlikely	N/A
Inclement Weather	Operations	Likely	N/A
Material Handling	Sample	Likely	N/A
Motion of Machinery (Struck by Hazards)	Operations	Unlikely	N/A
Noise (Sound Pressure Level), dBA	Operations	Likely	90 dBA TWA OSHA
Rolling or Pinching Objects	Operations	Unlikely	N/A
Slips/Trips/Falls	Operations	Likely	N/A
Traffic-On or Near Site	Operations	Likely	N/A
Mold	Operations	Likely	N/A

6 Hazard Controls

A general summary of the hazards and an evaluation of those hazards are presented below. More detailed control procedures are provided in Appendix B or in another section of this HASP as indicated in Table 7.

Table 7: Summary of Hazards

Task Number(s)	Hazards	Relative Hazard /Risk Rating*				Hazard Controls Appendix and/or HASP Section
1/2	Chemical	NA <input type="checkbox"/>	Low <input checked="" type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	B1
1/2	Physical	NA <input type="checkbox"/>	Low <input type="checkbox"/>	Medium <input checked="" type="checkbox"/>	High <input type="checkbox"/>	B2
	Mechanical	NA <input checked="" type="checkbox"/>	Low <input type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	B3
1	Traffic/Equipment	NA <input type="checkbox"/>	Low <input checked="" type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	B4
1/2	Electrical Hazards	NA <input type="checkbox"/>	Low <input checked="" type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	B5/B18
1/2	Fire/Explosion	NA <input type="checkbox"/>	Low <input type="checkbox"/>	Medium <input checked="" type="checkbox"/>	High <input type="checkbox"/>	B6
1	Noise (Acoustical)	NA <input type="checkbox"/>	Low <input type="checkbox"/>	Medium <input checked="" type="checkbox"/>	High <input type="checkbox"/>	B7
1/2	Ventilation / Oxygen Deficiency	NA <input type="checkbox"/>	Low <input checked="" type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	B8
1/2	Heat Stress	NA <input type="checkbox"/>	Low <input type="checkbox"/>	Medium <input checked="" type="checkbox"/>	High <input type="checkbox"/>	B9
1/2	Cold Stress	NA <input type="checkbox"/>	Low <input type="checkbox"/>	Medium <input checked="" type="checkbox"/>	High <input type="checkbox"/>	B10
1/2	Insects, Spiders, Snakes	NA <input type="checkbox"/>	Low <input checked="" type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	B11
	Poisonous Plants	NA <input checked="" type="checkbox"/>	Low <input type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	B12
1/2	Personal Safety	NA <input type="checkbox"/>	Low <input checked="" type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	B13
1/2	Working Alone	NA <input type="checkbox"/>	Low <input checked="" type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	B14
1/2	Severe Weather	NA <input type="checkbox"/>	Low <input checked="" type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	B15
1	Above and Underground Utilities	NA <input type="checkbox"/>	Low <input checked="" type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	B16 & Sections 6.2 - 6.3
	Trenching/Excavation	NA <input checked="" type="checkbox"/>	Low <input type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	Use Comprehensive HASP
	Water Safety	NA <input checked="" type="checkbox"/>	Low <input type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	Use Comprehensive HASP
1/2	Ergonomics / Material Handling	NA <input type="checkbox"/>	Low <input checked="" type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	B17
	Power Tools	NA <input checked="" type="checkbox"/>	Low <input type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	B18
1/2	Vehicle Use	NA <input type="checkbox"/>	Low <input type="checkbox"/>	Medium <input checked="" type="checkbox"/>	High <input type="checkbox"/>	B19
	Seasonal Hunting	NA <input checked="" type="checkbox"/>	Low <input type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	B20
	Demolition	NA <input checked="" type="checkbox"/>	Low <input type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	Use Comprehensive HASP
	Unexploded Ordinances	NA <input checked="" type="checkbox"/>	Low <input type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	Use Comprehensive HASP
	Closed/Abandoned Mines	NA <input checked="" type="checkbox"/>	Low <input type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	Use Comprehensive HASP
	Confined Space	NA <input checked="" type="checkbox"/>	Low <input type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	Use Comprehensive HASP
	Spills	NA <input checked="" type="checkbox"/>	Low <input type="checkbox"/>	Medium <input type="checkbox"/>	High <input type="checkbox"/>	Use Comprehensive HASP

NOTE: A single hazard may be listed under several Tasks. In this case, use the highest Severity ranking of the tasks evaluated as the overall ranking.

Table 8: *Hazard/Risk Matrix Decision Table

The Hazard...	Has No Severity	Has Minimal Severity	Has Moderate Severity	Has High Severity
Is Not Present (i.e., 0% of your on-site time does not expose you to this Hazard)	NA	NA	NA	NA
Is Rarely Present (i.e., <25% of your on-site time exposes you to this Hazard)	NA	LOW	LOW	MED
Is Sometimes Present (i.e., 25% - <50% of your time exposes you to this Hazard)	NA	LOW	MED	HIGH
Is Frequently to Constantly Present (i.e., 50% to 100% of your time exposes you to this Hazard)	NA	MED	HIGH	HIGH

*Relative Risk Rating Scale takes into account the frequency of the hazard and the severity of the injury the hazard can cause to employees without regard to PPE usage. In general,

- Minimal Severity requires first aid;
- Moderate Severity requires professional medical attention; and
- High Severity requires immediate medical attention/life-threatening.

6.1 General Subsurface Clearance Requirements

If the tasks presented in this HASP involve subsurface work, Table 9 and the specific procedures outlined in Section 6.2 are applicable and must be followed. Table 9 summarizes the steps required to be completed, including justification of any exceptions. This table must be completed in its entirety prior to conducting subsurface work.

Table 9: Subsurface Clearance (SSC) Actions

Subsurface Clearance (SSC) Pre-Project Planning Checklist Document the steps that must be followed and justify any exceptions. This checklist MUST be completed in its entirety.				
SSC Requirements	Yes	No	NA	Comments
1 Prequalification of Contractor for the capability of ground disturbance work performed (See Section 6)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	No subsurface work will be completed as part of this project.
2 "Designated Person" for SSC work assigned (must be on-site)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	No subsurface work will be completed as part of this project.
3 Historical Site Information Review	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	No subsurface work will be completed as part of this project.
4 Development of site-specific plot plan	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	No subsurface work will be completed as part of this project.
5 Ground penetrating location marked prior to locate(s) and alternate locations chosen	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	No subsurface work will be completed as part of this project.
6 Service notifications provided to clear/locate public utilities	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	No subsurface work will be completed as part of this project.
7 Private locate contracted for on-site utilities	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	No subsurface work will be completed as part of this project.
8 Designated Person present during private locating	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	No subsurface work will be completed as part of this project.
9 Underground utilities identified prior to commencement of intrusive activities as reasonably feasible	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	No subsurface work will be completed as part of this project.
10 Site walkover conducted to assess utility locations, visual indicators and complete SSC Field Checklist	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	No subsurface work will be completed as part of this project.
11 Ground penetration locations(s)/area(s) and Critical Zones (i.e., the 5ft or 1.5m distance surrounding intrusive activities in every direction) cleared	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	No subsurface work will be completed as part of this project.

6.2 Specific Subsurface Clearance (SSC) Procedures

The hazards posed by the presence of underground and overhead services are significant. Where there is a requirement for ground penetrating activity, the work shall be thoroughly vetted prior to commencing subsurface work. No intrusive work is to be conducted until the hazards associated with the possible presence of underground and overhead services have been properly identified, and safe locations for intrusion marked and agreed upon. This applies to any intrusive site work (i.e., any work which will involve the disturbance or penetration of the ground or

manmade surface by mechanical or manual means, INCLUDING: trial pit excavations, borehole excavations (shell and auger, rotary, hydraulic, percussive), gas spiking, manual excavations, hand digging, intrusion into vertical, indoor, or below ground surfaces, and/or any other on-site activity where disturbance of the ground surface is required). If conducting intrusive activities, the following tasks must be completed **and documented** prior to initiating ground disturbance activities (each is summarized below):

6.2.1 Historical Site Information Review

Obtain the most recent as-built drawings and/or site plans (including underground storage tank (UST), product and vent lines), as available. Consider requesting any other site plot plans, surveys, photographs, and information that might be instructive from the Client or other sources. Site information reviewed shall be specified in Table 9 SSC Actions (above).

6.2.2 Plot Plan

Develop a plot plan that accurately reflects all available information and site conditions as accurately as possible, including the number of facilities/pipelines or utilities, locations and alignments. The plot plan shall be updated as SSC activities commence to properly capture site-conditions or visual indicators. Intrusive activities shall not proceed without an updated plot plan or drawing.

6.2.3 Pre-Marking Ground Disturbance Locations

Whenever feasible, ground disturbance locations and/or areas shall be pre-marked using white stakes, white paint or white flags (or black in cases where snow is on the ground) prior to the public and/or private utility mark-outs. Pre-marking provides the line locators with visual boundaries as guidance in clearing locations and placing marks.

6.2.4 Line Location Services

In areas where public and private resources are available, **Impact7G will contact both public and private utility locate services for any project that involves intrusive activities.** In order to give line operators sufficient time to respond to a request to locate, a minimum of 72 business hours is required prior to the planned start of work. In the event that the driller/excavator retains these services, Impact7G will conduct a follow-up to confirm utility locate information.

Meet directly with the private locator and provide them with location plans, if possible. If an on-site meeting with the private locator is not possible, you **MUST** contact the private locator so that they understand the scope of the proposed subsurface work and the extent of their activities.

6.2.5 Site Walkover-Visual Indicators

The Designated Person **MUST** conduct a site walk-over and complete the SSC Field Checklist (Appendix C) for all projects that involve ground disturbance. The site walk-over and visual inspection is most effective when completed during locating activities, but, at a minimum, must be completed **PRIOR** to ground disturbance. The main intent of the SSC Field Checklist is to

identify above ground indicators which may identify the potential existence of a subsurface issue. It will also be used to confirm that common utilities have been accounted for, located and verified. Any potential underground utilities should be marked on a site plot plan and the site walkover should be documented utilizing Impact7G's Subsurface Clearance Field Checklist.









6.2.6 Utility Mark-out

All known pipelines and utilities, as noted on the plot plan, pipeline map or drawing, that pass within the search zone must be located, identified and marked to indicate location and alignment.

A qualified and competent line locator shall conduct line-locating practices utilizing available pipeline maps or plot plans for all areas within the search zone. Direct connection (clamping on) to all possible nearby underground services should be undertaken whenever possible to increase the success rate/reliability in locating. **The specific ground penetration location must be cleared to the edge of the critical zone** (5 feet or 1.5m area surrounding intrusive locations/areas in every direction) using a search and sweep method to verify maximum detection capabilities.

If anticipated services are not identified or located, drilling or ground disturbance will not occur until the service is visually identified.

Commonly used utility mark-out colors and identifiers are listed below:

	WHITE - Proposed Excavation
	PINK - Temporary Survey Markings
	RED - Electric Power Lines, Cables, Conduit, and Lighting Cables
	YELLOW - Gas, Oil, Petroleum, or Gaseous Materials
	ORANGE - Communication, Alarm or Signal Lines, Cables or Conduit
	BLUE - Potable Water
	PURPLE - Reclaimed Water, Irrigation and Slurry Lines
	GREEN - Sewer and Drain Lines

Upon completion of their work (whether you are on-site or not), the private locator **MUST** contact you to present their results. In addition to providing you with an overall summary of their work, **they must also inform you of any unique circumstance(s) that limited their ability to locate the potential presence of underground utilities (e.g., the existence of overhead**

electrical lines); if they encountered any abnormalities (e.g., concrete surfaces with reinforced rebar); and/or any other condition which may have diminished the validity of their results and efforts.

Where doubt exists over the location of a service, request a site visit from the appropriate utility provider or abandon locations in the immediate area and contact the PM and/or PIC.

6.2.7 Clearance of Ground Disturbance Locations & Critical Zones:

After anticipated utilities have been located and marked, use the available information along with regulatory requirements and project objectives to select final ground disturbance locations.

Each specific ground penetration location must be cleared to the edge of the critical zone (5 feet or 1.5m area surrounding intrusive locations/areas in every direction) using a search and sweep method to verify maximum detection capabilities. Ensure that all detected services and those featured on location plans are outside of the critical zone of EACH location where intrusive work will occur, using a sweep and search method.

The critical zone takes into account minimum tolerance distances from facility lines (which vary by location) and uncertainties introduced by on-site conditions, human factors, and equipment. **No intrusive activities shall take place within a critical zone with which utilities or visual indicators intersect.** When known utilities intersect ground disturbance critical zones, boring and/or excavation location criteria should be reevaluated by the Designated Person and PM, and if possible, moved to a pre-cleared alternate location.

In the event that work is required to be conducted in a critical zone containing a marked utility or visual indicator, approval MUST be obtained from the PIC, PM and H&S Director prior to ground penetrating activities.

6.2.8 Overhead Lines

Ensure that any ground penetrating activities are located a minimum of 28 feet (9m) horizontally from any overhead electric cable-supported wooden poles, or 50 feet (15m) horizontally in the case of those supported on metal poles/towers. Where this cannot be achieved, contact the appropriate electricity provider for guidance as well as the PIC/PM and Director H&S.

7 Personal Protective Equipment

This section of the Site Health and Safety Plan is a reference of selection for different levels of Personal Protective Equipment (PPE). The protective equipment will be selected based on the contaminant type(s), concentration(s) in air (if any), standing liquid (if any), or other applicable matrix, and the known route(s) of entry into the human body.

Table 10: Task Specific PPE

Task Description	Level of Protection			
	A	B	C	D
Asbestos Abatement Observation	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Mold Remediation Confirmation	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Key:

Level D: Long sleeve shirt*; long pants*; hard hat; eye protection; hearing protection; and safety shoes.

Level C: Level D protection plus negative pressure respiratory protection with appropriate cartridges; chemical protective coveralls in lieu of general coveralls; use of inner and outer sets of hand protection.

Level B: Level C protection plus Pressure-demand supplied air respirator with escape bottle in lieu of negative pressure respirator; chemical resistant coveralls with hood; chemical resistant boots.

Level A: Level B protection plus fully encapsulating (gas tight) chemically resistant suit.

*Clothing made of natural fibers shall be worn when a shock or arc flash hazard exists.

Key: **Req** = Required; **Rec** = Recommended; **NA** = Not Applicable

Table 11: Personal Protective Equipment and Supplies Specific PPE

Equipment	Req	Rec	NA	Equipment	Req	Rec	NA
Steel-toe Boots	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	SCBA	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Outer Disposable Boots	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Full-face Airline Resp.	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Long Sleeve Shirt and Pants	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Full Face Negative Pressure Resp.	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Flame Retardant Coveralls	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Half Face Negative Pressure Resp (required if potential fiber releases during sampling)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Tyvek Suit	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Powered Air Purifying Resp	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Poly-coated Tyvek / Saranex Suit	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	First Aid Kit	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Fully Encapsulated Chemical Suit	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Fire Extinguisher	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Hearing Protection	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Mobile Phones	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Leather Gloves	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Walkie Talkies	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Outer Chemical Gloves (Type): Nitrile	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Water or Other Fluid Replenishment	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Inner Chemical Gloves (Type):	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Eye Wash	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Hard Hat	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Sunscreen	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Safety Glasses with Side Shields	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Insect Repellent	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Vented (Splash proof) Goggles	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Other:	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

8 Air Monitoring/Sampling Procedures

Conducting an applicable task may necessitate using one or more monitoring devices as listed in Table 12, particularly if gases, vapors, explosion hazards and/or oxygen deficient atmosphere can occur or are expected. If a monitoring device will be utilized, the corresponding device letter should be placed in the column labeled "Monitoring Instrument Required" in Table 13.

Table 12: Monitoring Devices Available

A	PID (10.6 eV)	H	Summa Canister
B	PID (11.7 eV)	I	Heat Stress Monitor
C	FID	J	Low Flow Pumps
D	OVA	K	High Flow Pumps
E	CGI/LEL	L	Radiation Detector
F	Colorimetric Indicator Tubes	M	Gas Multimeter
G	Dust Monitoring	N	Other Device:

With respect to Table 12, also insert the task and the applicable Action Level in the appropriate box using 50% of the most restrictive (lowest) PEL or TLV as the Trigger. For example, if the most restrictive PEL for a particular VOC is 50 ppm, use 25 ppm as the "Trigger" value.

Table 13: Required Monitoring

Required Monitoring	Constituent	Task(s)	Trigger (action level)	Monitoring instrument required
If monitoring is necessary to identify that a risk is at or above tolerable limits and/or is used in controlling a risk on site, document the task and the maximum allowable exposure or trigger, and the monitoring instrument required to be used.	Asbestos	1	1 fiber/cc	J
	Oxygen		19.5% to 23.5%	
	Carbon Monoxide		25 ppm	
	H ₂ S		5 ppm	
	C ₂ S			
	CH ₄		0.5% or 5000 ppm	
	VOCs: Total		0.5 ppm	
	Semi - VOCs:			
	Metals			
	Dusts			
	Others:			
	Others:			

Note:

8.1 Action Level Guidance

In general, this HASP must address site-specific chemicals as noted in Table 13. However, there are chemicals commonly encountered in the workplace that may not be a chemical targeted for sampling but nonetheless will have adverse health effects. These chemicals are listed in Table 14 below.

Table 14. Action Levels for Commonly Encountered Compounds

Compound	Action Level
Volatile Organic Compounds (as Benzene)	0.5 ppm MAXIMUM
Methane (CH ₄)	0.5% MAXIMUM or 5000 ppm
Carbon Dioxide (CO ₂)	0.25% OR 2500 ppm MAXIMUM
Carbon Monoxide (CO)	25 ppm MAXIMUM
Hydrogen Sulfide (H ₂ S)	5 ppm MAXIMUM
Oxygen (O ₂)	19% MINIMUM – 23.5% MAXIMUM

8.2 Odors

If strong odors are encountered or if personnel develop headaches, dizziness or other potential exposure symptoms, the personnel shall leave the work area to a well-ventilated area and contact the PM and HSR for further instructions.

8.3 Dusts

The permissible exposure levels for total and respirable dusts are 15 and 5 mg/m³, respectively. In general, at these concentrations, you will not be able to read the face of a wristwatch (with your arm extended) when the total dust concentration reaches 15 mg/m³. Particles of dust in the respirable size range cannot be seen without the aid of a microscope but in aggregate, may be perceived as a haze. More importantly and with few exceptions, when dust is noticeable in the air, more respirable particles will exist than larger particles.

Typically, controlling dusty investigative activities through the use of a water sprayer will control potential exposures. However, in the event that dusty conditions exist that are not related to investigative/remedial activities (dry, uncovered soils with high winds), personnel shall leave the area and contact the PM and HSR for further instructions.

9 Decontamination

9.1 Sampling and Construction Equipment Decontamination

Decontamination involves the orderly controlled removal of contaminants. All undedicated sampling equipment and sampling meters (if applicable) will be cleaned prior to and between each use. All on-site equipment will be decontaminated and allowed to air dry before leaving the site. Decontamination may be accomplished using an approved cleaner, water, and steam. Subcontractors will be responsible for decontamination of their own equipment used during field operations, as well as disposal of any decontamination fluids.

9.2 Personnel Decontamination

All site personnel should minimize contact with contaminants. All disposable PPE will be containerized in an approved asbestos disposal container (including respirator cartridges). Non-disposable PPE must be decontaminated, particularly the safety boots. Any PPE that cannot be decontaminated should be disposed of along with waste generated from field operations. The container will be sealed and labeled appropriately, stored at a single secure location on the site, and be disposed of appropriately off-site.

Personnel shall wash and remove PPE prior to leaving the site. At a minimum, gross removal of contaminants from the PPE, removal of the PPE, and washing of hands and face shall be required upon exiting the work area.

During emergencies, the need to quickly respond to an accident or injury must be weighed against the risk to the injured party from chemical exposure. It may be that the time lost or additional handling of an injured person during the decontamination process may cause greater harm to the individual than from the exposure that would be received by undressing that person without proper decontamination. The decision must be made by the HSR.

9.3 Investigation Derived Material Disposal

1. Decontamination solutions: Not expected to be generated
2. Used disposable PPE such as boot covers: Appropriately disposed of in accordance with facility instructions

10 Site Communications

Communication between personnel within the project areas will be via verbal communication or hand signals. Visual contact between members of task teams should be possible throughout the course of project activities. Contact with the Impact7G Site Supervisor will be through direct verbal communication. The hand signals listed below will be used by personnel wherever respiratory protection and/or equipment noise limit verbal communication.

<u>Signal</u>	<u>Meaning</u>
Thumbs up	Ok, all is well
Grab throat with both hands	Can't breathe
Shake head, thumbs down	No, negative
Point right when facing equipment operator	Move/steer left
Point left when facing equipment operator	Move/steer right
Grab partner's wrist	Leave area immediately

11 Emergency Response Plan (ERP)

NOTE: Specific emergency contact information and applicable directions to the nearest medical facility are contained in Appendix B (i.e., the FIRST AND LAST PAGES of this HASP). In the event that an emergency situation occurs, SECURE the safety of yourself and those working under your direction and then contact the appropriate site and Impact7G representatives that are referenced in Section 2.4 of this HASP.

11.1 Stop Work Authority

All Impact7G employees have the authority and obligation to stop any task or operation where concerns and/or questions regarding the control of HSE risk exist, are not clearly established, or are not understood. Management is responsible for creating a culture where Stop Work Authority is exercised freely and without fear of retribution or intimidation.

When an unsafe condition is identified, a Stop Work intervention will be initiated and treated as a “near miss”. As such, an incident report will be completed in accordance with Standard Practice Instruction (SPI) 19 entitled “Incident Reporting” so that the unsafe condition can be documented, reviewed, and corrective actions and preventative measures be implemented as applicable.

These actions will be coordinated by the Site Supervisor, with support from the PM or PIC and the HSR, and all affected personnel will be notified of the Stop Work issue. No work will resume until all Stop Work issues and concerns have been adequately addressed. Most issues can be resolved in a timely manner at the job site, but occasionally additional investigation and corrective actions may be required. Work may resume when it is safe to do so.

11.2 General Emergency guidelines are as follows:

11.2.1 First Aid Procedures

Each field project should have a first aid kit available for use. The contents of which should be based on the treatment of the following potential injuries: major wounds, minor wounds (cuts and abrasions), minor burns and eye injuries including protective gloves, breathing barrier, eyewash solutions, and bandages. Since each workplace is unique, additional first aid products should be selected to augment required contents based on the particular work environment.

If an employee is injured, general first aid will be administered. If safety concerns or hazardous conditions are still present, the individual shall be moved to avoid further injury or risk. In the event that an employee is injured in a contaminated area, general first aid will be administered and then the employee will be moved to the support zone for decontamination (if applicable), additional first aid, and preparation for transportation, giving due consideration to which risk will be greater; the spread of contamination or the health/safety of the individual.

11.2.2 Fire Procedures

In the event of a fire, the Client contact and/or the local firefighting authorities shall be immediately notified. If safe and feasible, a fire extinguisher may be used to attempt to extinguish

the fire. Upon depletion of one fire extinguisher, all personnel shall evacuate the area and await local fire fighters.

11.2.3 Spill Procedures

If warranted, before any work is initiated at the site, applicable local, state, and/or Federal Emergency Response Authorities will be identified by the preparer of this HASP. In the event of a spill, the Client contact shall be immediately notified. If possible and feasible, attempts should be made to contain the spill. If it is determined by consultation with the PM and Client contact that there is no apparent threat to the population or environment, arrangements should be made with a commercial cleanup company to mitigate the spill.

11.2.4 Uncovering an Underground Service (Intact)

In the event of any damage or dislocation of any underground facility/pipeline or utility in connection with ground disturbance activity, work activities shall cease in the area of the damaged facility. The Designated Person shall immediately call the applicable emergency phone number. Then, the affected utility and One Call service shall be notified, if applicable. The One Call service may be able to assist with contact numbers for notifying member companies in the event of any damage. NO ONE should attempt to repair, clamp or constrict the damaged utility.

ALWAYS ASSUME THAT ANY UNDERGROUND PIPE OR SUBSURFACE LINE IS LIVE!

- Stop Work; remove tools if safe to do so.
- Clear all persons from the scene.
- Call the emergency number.
- Contact the One Call/utility member for guidance, if applicable.
- Contact the PM and/or PIC so they can contact the Client, MP, Director of H&S and HSR.

11.2.5 Striking an Underground Electrical/Telecom Cable

- Stop work, remove tools ONLY if safe to do so (operator seats in excavators are normally electrically isolated ALTHOUGH OTHER PARTS MAY BE LIVE IF STILL IN CONTACT WITH A LIVE CABLE).
- Evacuate the immediate area.
- In the event of injuries provide first aid and summon medical assistance.
- Contact the site contact.
- Contact the PM/Director and HSR.
- Contact the electricity/telecom provider, as directed by site contact and/or PM.
- Do not allow anyone to enter the area of the excavation until the electricity provider has made the cable safe.

11.2.6 Striking a Pressurized Gas Pipeline

- Stop work, leave tools in-place but shut off any running equipment, including engines.
- Evacuate the immediate area.
- Ensure there are no sources of ignition in the area.
- Contact the site contact.
- Contact the PM/Director and HSR.
- Contact the pipeline owner, as directed by site contact and/or PM.
- Do not re-enter the immediate area until safe to do so.

11.2.7 Striking a Pressurized Water Main

- Stop work, remove tools if safe to do so, and if necessary and safe to do so, confine jetting water, if appropriate.
- Evacuate the immediate area and inform site personnel.
- Ensure that water flowing away is not creating potential hazards (e.g., electrical shorting, flooding, contaminant migration etc) and where possible warn those likely to be affected.
- Contact the site contact.
- Contact the PM/Director and HSR.
- Contact the pipeline owner, as directed by the site contact and/or PM.
- Do not re-enter the immediate area until safe to do so.

11.3 Incident Reporting

With respect to incidents, the following types of EHS incidents are to be reported:

- All employee injuries and illnesses that include first aid, doctor/hospital visits which may or may not involve restricted work and/or lost time;
- Environmental incidents and exposures, such as spills or other unplanned releases to the environment or nonconformance to operating procedures;
- All evacuations (false or real);
- Any Property damage;
- Near miss incidents which could have resulted in an injury, an accident, environmental impact or significant loss of facilities;
- Public/third party liability - Incidents that involve injury, illness or property damage due to the actions of any non-Impact7G employee arising out of, or in connection with the Firm's contracted scope of work, operations, products, or premises.

All of the incident types outlined above **MUST** be communicated by the affected employee or an Impact7G employee witnessing the incident to either the local HSR, PM, or PIC immediately

following the incident, either in person or via phone, e-mail, or text messaging. This contacted person will then ensure that the other core project members, plus the Director of H&S, and the Managing Principal are informed either in person or via phone, e-mail, or text messaging, regardless of time of day. The PIC will notify the Client of the incident as appropriate in a timely fashion. In the event, an employee is killed on the job or suffers a work-related hospitalization, amputation, or loss of an eye the applicable regulatory agency will be notified by the Director of Health and Safety.

In the event of an incident, an Incident Investigation Report form will be forwarded for completion by the affected employee and sent to the core project members (i.e., the local HSR, PM, or PIC), the Director of H&S, and the Managing Principal for preliminary root cause analysis. The root cause analysis will not be deemed complete until input from the Director of H&S and the Managing Principal (and others as necessary) has been obtained. Similarly, the implementation of any corrective/preventive actions will NOT be implemented until input from the Director of H&S and the Managing Principal (and others as necessary) has been obtained.

12 Health and Safety Plan Field Team Signatures

Sign off sheet attesting that the HASP has been made available and reviewed by the individual prior to entry into the site.

I have read, understood, and agree with the health and safety protocols presented in the Health and Safety Plan (HASP) and the information discussed in the health and safety briefing. I also understand that noncompliance with the HASP may result in dismissal from the site.

Printed Name	Title	Company	Signature

Date: _____ Time: _____

Location: _____

Conducted By: _____

Signed By: _____

13 Safety Meeting Checklist

The Site Supervisor should consider discussing the following topics with all field personnel conducting work as part of this HASP, as applicable.

Date and Time of Meeting: _____

Conducted By: _____

CHECK TOPIC(S) DISCUSSED:

HASP Content

- ☐ Chemicals of Concern
- ☐ Tasks to be Performed
- ☐ Location of Tasks
- ☐ Hazards/Risks of Tasks
- ☐ Site Limitations (e.g., cell phone use)

First Aid

- ☐ Facilities
- ☐ Reporting and Records
- ☐ Treatment of _____

Personal Protective Equipment

- ☐ Glasses, Goggles, and Shields
- ☐ Hard Hats
- ☐ Respirators
- ☐ Gloves
- ☐ Other _____

Emergency Procedures

- ☐ Communications
- ☐ Primary Rally Point:
- ☐ Secondary Rally Point:
- ☐ Headcount
- ☐ Hospital Location/Route
- ☐ PPE/Decon
- ☐ Other _____

Special Tools / Equipment

- ☐ Chain saws / Chop saws
- ☐ Other _____
- ☐ Other _____

HASP Content

- ☐ Personnel On-Site (Introductions)
- ☐ Responsibilities
- ☐ Monitoring equipment
- ☐ Other _____
- ☐ Other _____

Industrial Sanitation and Hygiene

- ☐ Drinking water
- ☐ Restrooms/Porta toilets
- ☐ Personal Cleanliness

Housekeeping

- ☐ Waste Containers
- ☐ Waste Materials
- ☐ Other _____

Fire Prevention

- ☐ Extinguisher Locations
- ☐ Designated Smoking Areas
- ☐ Hot Work
- ☐ Flammable Liquids Present
- ☐ Explosives Present
- ☐ Other _____

Vehicles/Heavy Equipment

- ☐ Transportation of Employees
- ☐ Operation and Inspection
- ☐ Preventative Maintenance
- ☐ Other _____

Discussion _____

Appendix A

Chemical Information and Material Safety Data Sheets

DRAFT

Hazardous Property Information

Check if Present	Material (CAS #)	Water Solubility ^a	Specific Gravity	Flash Point (°F)	Vapor Pressure ^d	LEL UEL	OSHA - Cal/OSHA PEL- TWA ^f	IDLH Level ^h	Odor Threshold Geometric mean ⁱ (ppm)
Volatiles Organic Compounds (VOCs)									
<input type="checkbox"/>	Acetic acid (64-19-7)	Miscible	1.05	103	11 mm	4.0% 19.9%	10 ppm	50 ppm	0.074 (d)
<input type="checkbox"/>	Acetone (67-64-1)	Miscible	0.79	0	180 mm	2.5% 12.8%	250 ppm	2,500 ppm	62 (d) 130 (r)
<input type="checkbox"/>	Acrolein (107-02-8)	40%	0.84	-15	210 mm	2.8% 31%	C 0.1 ppm Skin	2 ppm	1.8 (d)
<input type="checkbox"/>	Acrylonitrile (107-13-1)	7%	0.81	30	83 mm	3% 17%	2 ppm Skin	85 ppm Ca	1.6 (d)
<input type="checkbox"/>	Benzene (71-43-2)	0.07%	0.88	12	75 mm	1.2% 7.8%	1 ppm Skin	500 ppm Ca	61 (d) 97 (r)
<input type="checkbox"/>	Bromodichloromethane (75-27-4)	4500 mg/l	1.98	--	50 mm	Non-flam	None established	None determined	--
<input type="checkbox"/>	Bromoform (75-25-2)	0.10%	2.89	--	5 mm	Non-flam	0.5 ppm Skin	850 ppm	1.3 ^j
<input type="checkbox"/>	Bromomethane (74-83-9)	2%	1.73	--	1.9 atm	10% 16.0%	1 ppm Skin	250 ppm Ca	80 ^j
<input type="checkbox"/>	Carbon Tetrachloride (56-23-5)	0.05%	1.59	--	91 mm	Non-flam	2 ppm Skin	200 ppm Ca	252 (d)
<input type="checkbox"/>	Chlorobenzene (108-90-7)	0.05%	1.11	82	9 mm	1.3% 9.6%	10 ppm	1000 ppm	1.3 (d)
<input type="checkbox"/>	2-Chloroethyl-vinyl Ether (110-75-8)	0.02%	1.05	61	27 mm	--	None established	None determined	--
<input type="checkbox"/>	Chloroethane (75-00-3)	0.60%	0.92	-58	1000 mm	3.8% 15.4%	100 ppm Skin	3800 ppm	4.2 ^j
<input type="checkbox"/>	Chloroform (67-66-3)	0.50%	1.48	--	160 mm	Non-flam	2 ppm	500 ppm Ca	192 (d)
<input type="checkbox"/>	Chloromethane (74-87-3)	0.50%	0.92	--	5.0 ATM	8.1% 17.4%	50 ppm	2000 ppm Ca	10 ^j
<input type="checkbox"/>	Dibromochloromethane (124-48-1)	2700 mg/l	2.5	--	76 mm	--	None established	None Determined	--
<input type="checkbox"/>	Dibutyl phthalate (84-74-2)	0.001% (77°F)	1.05	315	0.00007 mm	0.5% --	5 mg/m ³	4,000 mg/m ³	--
<input type="checkbox"/>	1,2-Dichlorobenzene (95-50-1)	0.01%	1.3	151	1 mm	2.2% 9.2%	25 ppm Skin	200 ppm	--
<input type="checkbox"/>	1,1-Dichloroethane (75-34-3)	0.60%	1.18	2	182 mm	5.4% 11.40%	100 ppm	3,000 ppm	--
<input type="checkbox"/>	1,1-Dichloroethylene (DCE) (75-35-4)	0.04%	1.21	-2	500 mm	6.5% 15.5%	1 ppm	None determined	190 ^j
<input type="checkbox"/>	1,2-Dichloroethane (107-06-2)	0.90%	1.24	56	64 mm	6.2% 16%	1 ppm	50 ppm Ca	26 (d) 87 (r)
<input type="checkbox"/>	1,2-Dichloroethylene (540-59-0)	0.40%	1.27	36-39	180-265 mm	5.6% 12.8%	200 ppm	1,000 ppm	17 - 170 ^k
<input type="checkbox"/>	1,2-Dichloropropane (78-87-5)	0.30%	1.16	60	40 mm	3.4% 14.5%	75 ppm	400 ppm Ca	0.26 (d) 0.52 (r)
<input type="checkbox"/>	1,3-Dichloropropene (542-75-6)	0.20%	1.21	77	28 mm	5.3% 14.5%	1 ppm Skin	None Determined Ca	1 ^j
<input type="checkbox"/>	Bis-(2-Ethylhexyl)-phthalate (DEHP) (117-81-7)	0.00%	0.99	420	<0.01 mm	0.3% --	5 mg/m ³	5,000 mg/m ³ Ca	--
<input type="checkbox"/>	Diethyl phthalate (84-66-2)	0.10%	1.12	322	0.002 mm	0.7% --	5 mg/m ³	None Determined	--

Health and Safety Plan
Impact7G – ECIA – City of Clinton
EPA Brownfield Assessment Project

Check if Present	Material (CAS #)	Water Solubility ^a	Specific Gravity	Flash Point °F)	Vapor Pressure ^d	LEL UEL	OSHA - Cal/OSHA PEL- TWA ^f	IDLH Level ^h	Odor Threshold Geometric mean ⁱ (ppm)
<input type="checkbox"/>	Dinitrotoluene (DNT) (25321-14-6)	Insoluble	1.32	404	1 mm	-- --	0.15 mg/m ³ Skin	50 mg/m ³ Ca	--
<input type="checkbox"/>	Endrin (72-20-8)	Insoluble	1.7	--	0.00001 mm Low	--	0.1 mg/m ³ Skin	2 mg/m ³	--
<input type="checkbox"/>	Ethyl benzene (100-41-4)	0.01%	0.87	55	7 mm	0.8% 6.7%	100 ppm	800 ppm	2.3 ^j
<input type="checkbox"/>	Hydrazine (302-01-2)	Miscible	1.01	99	10 mm	2.9% 98%	0.01 ppm Skin	50 ppm Ca	3.7 (d)
<input type="checkbox"/>	Methyl ethyl ketone (MEK) (78-93-3)	28%	0.81	16	78 mm	1.4% 11.4%	200 ppm	3000 ppm	16 (d) 17 (r)
<input type="checkbox"/>	Methyl tert-butyl ether (MTBE) (1634-04-4)	5.1 g/100ml	0.7	-18	245 mm	1.6% 8.4%	40 ppm	None determined	0.32 – 0.47mg/m ³ ¹
<input type="checkbox"/>	Methylene chloride (75-09-2)	2%	1.33	--	350 mm	13% 23%	25 ppm	2,300 ppm Ca	160 (d) 230 (r)
<input type="checkbox"/>	Phenol (108-95-2)	9% (77°F)	1.06	175	0.4 mm	1.8% 8.6%	5 ppm Skin	250 ppm	0.06 (d)
<input type="checkbox"/>	1,1,2,2-Tetrachloroethane (79-34-5)	0.30%	1.59	--	5 mm	Non-flam	1 ppm Skin	100ppm Ca	7.3 (d)
<input type="checkbox"/>	Tetrachloroethylene (PCE) (127-18-4)	0.02%	1.62	--	14 mm	Non-flam	25 ppm	150 ppm Ca	47 (d) 71 (r)
<input type="checkbox"/>	Toluene (108-88-3)	0.07% (74°F)	0.87	40	21 mm	1.1% 7.1%	50 ppm Skin	500 ppm	1.6 (d) 11 (r)
<input type="checkbox"/>	1,1,1-Trichloroethane (71-55-6)	0.40%	1.34	--	100 mm	7.5% 12.5%	350 ppm	700 ppm	390 (d) 710 (r)
<input type="checkbox"/>	1,1,2-Trichloro-ethane (79-00-5)	0.40%	1.44	--	19 mm	6% 15.5%	10 ppm Skin	100 ppm Ca	--
<input type="checkbox"/>	1,2,4-Trichlorobenzene (120-82-1)	0.003%	1.45	222	1 mm	2.5% 6.6% (302 °F)	C 5 ppm	None Determined	3 ^j
<input type="checkbox"/>	Trichloroethylene (TCE) (79-01-6)	0.1% (77°F)	1.46	--	58 mm	8% 10.5%	25 ppm	1,000 ppm Ca	82 (d) 110 (r)
<input type="checkbox"/>	Trichlorofluoromethane (75-69-4)	0.1% (75°F)	1.47	--	690 mm	Non-flam	C 1,000 ppm	2000 ppm	--
<input type="checkbox"/>	1,1,2-Trichloro-1,2,2-trifluoroethane (76-13-1)	0.02%	1.56	--	285 mm	-- --	1,000 ppm	2,000 ppm	--
<input type="checkbox"/>	1,2,4-Trimethylbenzene (95-63-6)	0.006%	0.88	112	1 mm	0.9% 6.4%	25 ppm	None determined	2.4 (d)
<input type="checkbox"/>	Vinyl Chloride (75-01-4)	0.1% (77°F)	0.91	--	3.3 atm	3.6% 33%	1 ppm Skin	None Determined Ca	--
<input type="checkbox"/>	Xylene (o, p, m, mix) (1330-20-7)	Slightly soluble	0.86-0.88	81-90	7-9 mm	0.9% 7%	100 ppm	900 ppm	20 (d) 40 (r)
Metals									
<input type="checkbox"/>	Aluminum metal and oxide (as Al)	b	2.7	--	0 mm	e	10 mg/m ³ (respirable)	None determined	--
<input type="checkbox"/>	Antimony (7440-36-0)	b	6.69	--	0 mm	e	0.5 mg/m ³	50 mg/m ³	--
<input type="checkbox"/>	Arsenic (inorganic compounds, as As)	b	5.73	--	0 mm	e	0.010mg/m ³	5 mg/m ³ Ca	--
<input type="checkbox"/>	Arsenic (organic compounds, as As)	Properties vary depending upon the specific organic arsenic compound.					0.2mg/m ³	None determined	--

Health and Safety Plan
Impact7G – ECIA – City of Clinton
EPA Brownfield Assessment Project

Check if Present	Material (CAS #)	Water Solubility ^a	Specific Gravity	Flash Point °F)	Vapor Pressure ^d	LEL UEL	OSHA - Cal/OSHA PEL- TWA ^f	IDLH Level ^h	Odor Threshold Geometric mean ⁱ (ppm)
<input type="checkbox"/>	Barium chloride(as Ba) (10361-37-2)	38%	3.86	--	low	Non-flam	0.5 mg/m ³	50 mg/m ³	--
<input type="checkbox"/>	Barium nitrate (as Ba) (10022-31-8)	9%	3.24	--	Low	e	0.5 mg/m ³	50 mg/m ³	--
<input type="checkbox"/>	Beryllium and compounds (as Be)	b	1.85	--	0 mm	e	0.0002 mg/m ³	4 mg/m ³ Ca	--
<input type="checkbox"/>	Cadmium dust (as Cd)	b	8.65	--	--	e	0.005 mg/m ³	9 mg/m ³ Ca	--
<input type="checkbox"/>	Chromium (III) compounds (as Cr)	b	Properties vary depending upon the specific compound.				0.5 mg/m ³	25 mg/m ³	--
<input type="checkbox"/>	Cobalt metal dust and fume (as Co) (7440-48-4)	Insoluble	8.92	--	0 mm	e	0.02 mg/m ³	20 mg/m ³	--
<input type="checkbox"/>	Copper dust and mist (as Cu)	b	8.94	--	0 mm	e	1 mg/m ³	100 mg/m ³	--
<input type="checkbox"/>	Lead	Insoluble	11.34	--	0 mm	e	0.05 mg/m ³	100 mg/m ³	--
<input type="checkbox"/>	Manganese, Fume and compounds (as Mn) (7439-96-5)	Insoluble	7.2	--	0 mm	Combustible	0.2 mg/m ³	500 mg/m ³	--
<input type="checkbox"/>	Mercury compounds (as Hg) Except alkyl compound	b	13.6	--	0.0012 mm	e	0.025 mg/m ³ Skin	10 mg/m ³	--
<input type="checkbox"/>	Molybdenum (7439-98-7)	Insoluble	10.28	--	0 mm	Combustible	10 mg/m ³ 3 mg/m ³ (resp.)	5,000 mg/m ³	--
<input type="checkbox"/>	Nickel and other compounds (as Ni)	Insoluble	8.9	--	0 mm	e	1 mg/m ³	10 mg/m ³ Ca	--
<input type="checkbox"/>	Selenium (7782-49-2)	Insoluble	4.28	--	0 mm	Combustible	0.2 mg/m ³	1 mg/m ³	--
<input type="checkbox"/>	Silver, metal dust, and soluble compounds (as Ag)	b	10.49	--	0 mm	e	0.01 mg/m ³	10 mg/m ³	--
<input type="checkbox"/>	Thallium (soluble compounds, as Ti)	b	Properties vary depending upon the specific compound.				0.1 mg/m ³ Skin	15 mg/m ³	--
<input type="checkbox"/>	Vanadium pentoxide dust and Fume (1314-62-1)	0.8%	3.36	--	0 mm	e	0.05 mg/m ³ (Respirable)	35 mg/m ³	--
<input type="checkbox"/>	Zinc oxide (1314-13-2)	b	5.61	--	0 mm	e	5 mg/m ³	500 mg/m ³	--
Miscellaneous									
<input type="checkbox"/>	Ammonia (7664-41-7)	34%	--	--	8.5 atm	15% 28%	25 ppm	300 ppm	17 (d)
<input type="checkbox"/>	Asbestos (1332-21-4)	Insoluble	--	--	0 mm	Non-flam	0.1 fibers/cc	None determined	--
<input type="checkbox"/>	Chromic Acid and chromates (1333-82-0)	63%	2.7	--	Very low	Non-flam	0.005 mg/m ³	15 mg/m ³ Ca	--
<input type="checkbox"/>	Cyanide (as CN)	--	--	--	--	Non-flam	5 mg/m ³ Skin	--	--
<input type="checkbox"/>	DDT (50-29-3)	Insoluble	0.99	162-171	0.0000002 mm	--	1 mg/m ³ Skin	500 mg/m ³ Ca	--
<input type="checkbox"/>	Diesel Fuel #2 (68476-34-6)	Insoluble	0.81-0.90	130	--	0.6-1.3 6-7.5	None established	None determined	--
<input type="checkbox"/>	Fluorides, as F	--	--	--	--	--	2.5 mg/m ³	None determined	--

Health and Safety Plan
Impact7G – ECIA – City of Clinton
EPA Brownfield Assessment Project

Check if Present	Material (CAS #)	Water Solubility ^a	Specific Gravity	Flash Point (°F)	Vapor Pressure ^d	LEL UEL	OSHA - Cal/OSHA PEL- TWA ^f	IDLH Level ^h	Odor Threshold Geometric mean ⁱ (ppm)
<input type="checkbox"/>	Gasoline (8006-61-9)	Insoluble	0.72-0.76	-45	38-300 mm	1.4% 7.6%	300 ppm	Ca None determined	--
<input type="checkbox"/>	Kerosene (8008-20-6)	Insoluble	0.81	100-162	5 (100°F)	0.7% 5.0%	200 mg/m ³ Skin	None determined	--
<input type="checkbox"/>	Naphthalene (91-20-3)	0.03%	1.15	174	0.08 mm	0.9% 5.9%	10 ppm	250 ppm	0.038 (d)
<input type="checkbox"/>	PCB (42% chlorine) (53469-21-9)	Insoluble	1.39	--	0.001 mm	Non-flam	1 mg/m ³ Skin	5 mg/m ³ Ca	--
<input type="checkbox"/>	PCB (54% chlorine) (11097-69-1)	Insoluble	1.38	--	0.00006 mm	Non-flam	0.5 mg/m ³ Skin	5 mg/m ³ Ca	--
<input type="checkbox"/>	Phosphorus (yellow) (7723-14-0)	0.0003%	1.82	--	0.03 mm	--	0.1 mg/m ³	5 mg/m ³	--
<input type="checkbox"/>	Polycyclic Aromatic Hydrocarbons (PAH)	Properties vary depending upon the specific compound. Listed in NIOSH as Coal Tar Pitch Volatiles					0.2 mg/m ³	80 mg/m ³ Ca	--

SITE-SPECIFIC SUBSTANCES
(Add hazardous property information on any substances that are of concern at the site but are not listed above.)

EXPLANATIONS AND FOOTNOTES:

- ^a Water solubility is expressed in different terms in different references. Many references use the term "insoluble" for materials that will not readily mix with water, such as gasoline. However, most of these materials are water soluble at the part per million or part per billion level. Gasoline, for example, is insoluble in the gross sense, and will be found as a discrete layer on top of the ground water. But certain gasoline constituents, such as benzene, toluene, and xylene, will also be found in solution in the ground water at the part per million or part per billion levels.
- ^b Solubility of metals depends on the compound in which they are present.
- ^c Several chlorinated hydrocarbons exhibit no flash point in a conventional sense, but will burn in the presence of high energy ignition source or will form explosive mixtures at temperatures above 200°F.
- ^d Expressed as mm Hg under standard conditions.
- ^e Explosive concentrations of airborne dust can occur in confined areas.
- ^f OSHA and/or CAL/OSHA Time-weighted Average (TWA) Permissible Exposure Limits (PELs) except where noted in g. The substances designated by "Skin" in the PEL column may be absorbed into the bloodstream through the skin, the mucous membranes and/or the eye, and contribute to the overall exposure. "C" notation indicates the number given is a ceiling value.
- ^g TLV-TWA adopted by the American Conference of Governmental Industrial Hygienists (ACGIH). Currently, there is no OSHA and/or CAL/OSHA PEL.
- ^h The substances with a "Ca" notation in the IDLH column are considered to be potential occupational carcinogens by NIOSH.
- ⁱ Odor thresholds values extracted from "ODOR THRESHOLDS for Chemicals with established Occupational Health Standards", American Industrial Hygiene Association, 1997.
- (d) Odor detection threshold: Lowest concentration at which a stimulus is being detected.
- (r) Odor recognition threshold: Lowest concentration at which a definite odor character is detected.
- ^j Values extracted from the U.S. Environmental Protection Agency Technology Transfer Network, Air Toxics website. URL: www.epa.gov/ttn/atw/, 2006
- ^k Value extracted from "HESIS Guide to Solvent Safety" California Department of Health Services, 2004. URL: http://www.dhs.ca.gov/ohb/HESIS/solv_ch.htm
- ^l Value extracted from "Chemical Summary For Methyl-Tert-Butyl Ether", U.S. Environmental Protection Agency, Office Of Pollution Prevention and Toxics, August 1994. URL: http://www.epa.gov/chemfact/s_mtbe.txt

Appendix B

Control Mechanisms

DRAFT

The following control methods should be implemented for the listed hazards

B1 Chemical Hazards – Impact7G personnel, contractors, subcontractors, and visitors shall wear appropriate personal protective equipment (PPE) while performing site activities. At a minimum, equipment shall include safety glasses, steel-toed boots, and hard hats (when overhead work being performed or when overhead hazards exist). Impact7G personnel shall familiarize themselves with the appropriate health and safety responses for exposure to known on-site chemicals prior to beginning work at the site. See Attachment A for chemical safety data. Consult with your local Health and Safety Coordinator (HSR) for any personal air monitoring requirements.

B2 Physical Hazards – Impact7G personnel shall minimize the risk of slips, trips, and falls by keeping the work area clear of excess equipment and cleaning up wet surfaces as soon as possible. In addition, the floor of every workroom shall be maintained in a clean and, so far as possible, a dry condition. Employees should avoid walking through/on wet and/or cluttered surfaces and be conscious of the fact the wet surfaces could be slippery and could cause injury. Spilled materials should be cleaned up immediately.

Sufficient illumination should be provided in all areas at all times. Employees should notify the responsible person (e.g., Principal-in-Charge, Project Manager, and/or Health and Safety Coordinator) of conditions where there is an absence of sufficient natural and/or permanent artificial light.

All employees are responsible for maintaining the work area(s) and in a clean and orderly manner, and for notifying the responsible person (e.g., Principal-in-Charge, Project Manager and/or Health and Safety Coordinator) of conditions beyond their control.

B3 Mechanical Hazards – Impact7G personnel shall not attempt to operate equipment they are not familiar with and/or are not equipped with protection devices (e.g., guards). Personnel shall familiarize themselves with the equipment being utilized on site and shall at a minimum, know how to stop or turn off the equipment.

B4 Traffic/Heavy Equipment Safety - Impact7G personnel should, under no circumstances, operate or ride on heavy equipment which is being used by a subcontractor. Site personnel will maintain a safe distance of at least 20 feet (6.5 meters) or more, depending on circumstances and directives, from all heavy equipment in operation. If activities warrant closer proximities to operating equipment, personnel will don brightly colored vests and a second person will stand watch to keep him/her out of the path of equipment while performing the required activity. Eye contact with the equipment operator will be maintained.

B5 Electrical Hazards – Electricity may pose a particular hazard to site workers due to the use of portable electrical equipment. If wiring or other electrical work is needed, a qualified electrician must perform it.

Properly ground all electrical equipment. Avoid standing in water when operating electrical equipment. Ground fault outlets or adapters shall be used for any electrical equipment. Apparatus, tools, equipment, and machinery will not be repaired while in operation.

Lockout/Tagout (LOTO) procedures will be implemented when necessary. If equipment must be connected by splicing wires, electrical work must be performed by a licensed and competent electrician.

B6 Fire and Explosion Hazards – The presence of petroleum and solvent-impacted material presents a potential fire hazard. Smoking and use of open flame will be prohibited. The use of non-sparking tools and equipment will be implemented if conditions warrant. Where the potential for fire exists, Impact7G will provide portable fire extinguishers. Where applicable, all fire extinguishers shall be mounted no higher and no lower than 4 feet (1.22 m) from the floor and/or shall be readily accessible for use, where applicable. All fire extinguishers shall be maintained as follows:

- Fully charged and in operable condition;
- Clean and free of defects; and
- Readily accessible at all times

B7 Acoustical Hazards – Hearing protection will be worn by all personnel operating or working within the vicinity of equipment when noise is sufficient to interfere with general conversation at a normal speaking volume; when noise levels exceed 85dBA; and/or when manufacturers' requirements indicate that its usage is mandatory. Personal hearing protectors, such as earplugs or earmuffs, may be used to reduce the amount of noise exposure while the above control measures are being evaluated or if such controls fail to reduce the exposure levels to below the PELs.

B8 Ventilation/Oxygen Deficiency Hazards – Impact7G personnel shall monitor the work area for oxygen deficiency hazards using monitoring devices that have been appropriately calibrated and are recommended for this specific use, as applicable. If direct air monitoring readings suggest an oxygen deficiency and/or the build-up of harmful substances, leave the area and contact your Project Manager. Implementation of corrective actions may include but not be limited to increasing work zone ventilation or evaluating alternatives (e.g., removing equipment that is generating combustion exhaust or venting the exhaust to the exterior of the building). However, work will not continue until the ventilation/oxygen deficiency hazard has been properly addressed, implemented, and verified.

B9 Heat Stress – Heat stress can be a significant hazard, especially for workers wearing protective clothing. Depending on the ambient conditions and the work being performed, heat stress can occur very rapidly, within as little as 15 minutes. Site personnel will be instructed in the identification of a heat-stress victim, the first-aid treatment procedures for the victim and the prevention of heat-stress incidents.

Workers will be encouraged to immediately report any heat-related problems that they experience or observe in fellow workers. Any worker exhibiting signs of heat stress and exhaustion should be made to rest in a cool location and drink plenty of water. Emergency help by a medical professional is required immediately for anyone exhibiting symptoms of heat stroke, such as red, dry skin, confusion, delirium, or unconsciousness. Heat stroke is a life-threatening condition that must be treated by a competent medical authority.

Heat Stress Prevention

Whenever possible or within the control of Impact7G, engineering controls should be utilized to protect workers from heat-related hazards. For example, isolation from the heat source, ventilation such as open windows, fans or other methods of creating air flow, and heat shieldings such as awnings or umbrellas. Appropriate work practices can also lessen the chances of heat-related hazards. Some of these include:

- a. Water intake should be about equal to the amount of sweat produced (i.e., drinking 5-7 ounces of water every 15-20 minutes). Electrolyte fluids may also be necessary.
- b. Whenever possible, gradual exposure to heat is preferred to allow the body's internal temperature to acclimate to the working conditions.
- c. Whenever possible, adjust the work schedule to reduce the risk of heat stress. For example, postpone nonessential or heavier work to the cooler part of the day and perform work in the shade if portable.
- d. Rotate personnel to reduce the amount of time spent working in direct sun and heat.
- e. Increase the number and/or duration of rest breaks, and whenever possible, rest break areas should be in a cool area and as close to the work area as is feasible.

Wear appropriate PPE when necessary, such as thermally conditioned clothing, self-contained air conditioning in a backpack, and plastic jackets/vests with pockets that can be filled with dry ice or ice. However, based on the type of work being done, where work is being performed, or other required PPE, these options may be prohibited or make the use of this PPE impossible or impractical.

Allocation of Work in a Work/Rest Cycle	Acclimatized				Action (Unacclimatized)				Limit
	Light	Moderate	Heavy	Very Heavy	Light	Moderate	Heavy	Very Heavy	
75-100%	31.0 (87.8F)	28.0 (82.4F)	--	--	28.0 (82.4F)	25.0 (77F)	--	--	
50-75%	31.0 (87.8F)	29.0 (84.2F)	27.5 (81.5)	--	28.5 (83.3F)	26.0 (78.8F)	24.0 (75.2F)	--	
25-50%	32.0 (89.6F)	30.0 (86F)	29.0 (84.2F)	28.0 (82.4F)	29.5 (85.1F)	27.0 (80.6F)	25.5 (77.9)	24.5 (76.1F)	
0-25%	32.5 (90.5F)	31.5 (88.7F)	30.5 (86.9F)	30.0 (86F)	30.0 (86F)	29.0 (84.2F)	28.0 (82.4F)	27.0 (80.6F)	

B10 Cold Stress - The four Impact7G environmental conditions that cause cold-related stress are low temperatures, high/cool winds (wind chill), dampness, and cold water. One or any combination of these factors can cause cold-related hazards. Cold stress, including frostbite and hypothermia, can result in severe health effects.

A dangerous situation of rapid heat loss may arise for any individual exposed to high winds and cold temperatures. Major risk factors for cold-related stresses include:

- Wearing inadequate or wet clothing increases the effects of cold on the body.
- Taking certain drugs or medications such as alcohol, nicotine, caffeine, and medication that inhibits the body's response to the cold or impairs judgment.
- Having a cold or certain diseases, such as diabetes, heart, vascular, and thyroid problems, may make a person more susceptible to the winter elements.
- Being male increases a person's risk to cold-related stresses. Men experience far greater death rates due to cold exposure than women, perhaps due to inherent risk-taking activities, body-fat composition, or other physiological differences.
- Becoming exhausted or immobilized, especially due to injury or entrapment, may speed up the effects of cold weather.
- Aging -- the elderly are more vulnerable to the effects of harsh winter weather.

TABLE 2. Cooling Power of Wind on Exposed Flesh Expressed as Equivalent Temperature (under calm conditions)*

Estimated Wind Speed (in mph)	Actual Temperature Reading (°F)											
	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60
	Equivalent Chill Temperature (°F)											
calm	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60
5	48	37	27	16	6	-5	-15	-26	-36	-47	-57	-68
10	40	28	16	4	-9	-24	-33	-46	-58	-70	-83	-95
15	36	22	9	-5	-18	-32	-45	-58	-72	-85	-99	-112
20	32	18	4	-10	-25	-39	-53	-67	-82	-96	-110	-121
25	30	16	0	-15	-29	-44	-59	-74	-88	-104	-118	-133
30	28	13	-2	-18	-33	-48	-63	-79	-94	-109	-125	-140
35	27	11	-4	-20	-35	-51	-67	-82	-98	-113	-129	-145
40	26	10	-6	-21	-37	-53	-69	-85	-100	-116	-132	-148
(Wind speeds greater than 40 mph have little additional effect.)	LITTLE DANGER In < hr with dry skin. Maximum danger of false sense of security				INCREASING DANGER Danger from freezing of exposed flesh within one minute.				GREAT DANGER Flesh may freeze within 30 seconds.			
	Trenchfoot and immersion foot may occur at any point on this chart.											

*Developed by U.S. Army Research Institute of Environmental Medicine, Natick, MA.

Equivalent chill temperature requiring dry clothing to maintain core body temperature above 36°C (96.8°F) per cold stress TLV

Cold Stress Prevention

Engineering controls should be utilized whenever possible to protect workers from cold-related hazards. For example, on-site heat sources, heated shelters, work areas shielded from drafty or windy conditions, and the use of thermal insulating material on equipment handles. Effects arising from cold exposure will be minimized by the following control measures:

- Personnel will be trained to recognize cold stress symptoms.
- Field activities will be curtailed or halted if the equivalent chill temperature is below 20 F.
- As much as possible, work that exposes personnel to the cold will be done during the warmest hours of the day.
- Inactivity in cold conditions will be kept to a minimum.

- Frequent short breaks in warm, dry shelters will be taken.
- Vehicles will be equipped with supplies in case the vehicle becomes inoperable (e.g., a blanket, dry clothing, water, food, a shovel, etc).

The following PPE will be provided during work in cold environments:

- Workers will be provided with insulated dry clothing when the equivalent chill temperature is less than 30 F.
- Feet, hands, face, and head should be protected (40% of the body's heat can be lost when the head is exposed).
- Foot and hand wear may also need to be waterproof.
- Clothing should be layered so that adjustments can be made to changing environmental temperatures and conditions. For example, an outer layer to break the wind, a middle layer that will absorb sweat and retain insulation when wet, and an inner layer that allows ventilation.

B11 Insects, Snakes and Spiders - Care will be taken by all site workers to avoid stinging or biting insects such as ticks, spiders, bees, wasps, hornets, and yellow jackets. Workers allergic to any particular insect sting or bite should seek medical attention if stung or bitten and may need to carry emergency medicine prescribed by their doctor.

Care should always be taken to avoid these insects and increased vigilance is necessary during high infestation seasons, when opening protective casings of monitoring wells, and when walking through areas of heavy vegetation or areas known to be infested.

To minimize the chance of bites/stings:

- Wear appropriate PPE such as light-colored clothing so you can see insects, long pants tucked into boots, long sleeves when possible, a hat, and gloves if you are cutting brush or need to handle or move vegetation.
- Check your body and clothing for insects, shower after work and wash/dry clothes at as high temperature as possible.
- Don't swat at insects and don't eat in areas where there are insects.
- Avoid sweet smelling personal hygiene products and, unless contraindicated by the work being performed (e.g., sampling, data collection), wear EPA approved repellants such as those containing DEET.



Black Widow Spider



Brown Recluse Spider

Spider bites generally cause only localized reactions such as swelling, pain, and redness. However, bites from a Black Widow or Brown Recluse, or if you are allergic to spiders, can cause symptoms that are more serious.

First Aid for spider bites:

- Clean the bite area with soap and water and place a cold pack over the bite area to reduce swelling.
- Monitor for allergic reactions. If the victim has more than minor pain, or if nausea, vomiting, difficulty breathing, or swallowing occurs, medical attention should be sought immediately.



Tick




Removing a tick

Ticks are common, especially in the warmer weather months and may carry diseases such as Rocky Mountain Spotted Fever and Lyme disease.

First Aid for tick bites:

- Use a fine tipped tweezers, grasp tick firmly as close to skin as possible and pull the body away from skin. Avoid crushing the body and don't twist.
- If parts of the tick remain in the skin, don't be alarmed as the mouth will dislodge as skin sloughs off.
- Wash area with soap and water and apply antiseptic or antibiotic ointment to prevent infection.


- If unexplained symptoms develop such as severe headaches, fever, or rash within 10 days of the bite, seek medical attention.
- If possible, contain tick in an air tight container for identification purposes in the event of a serious reaction.

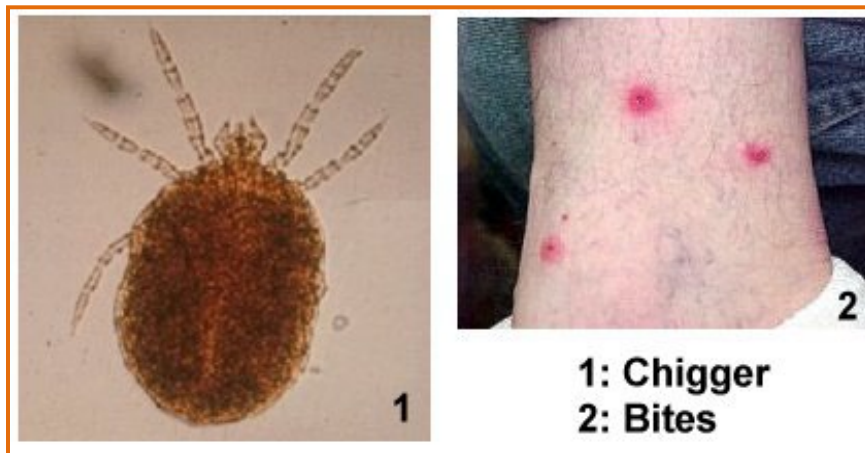

Chiggers are tiny, 8-legged wingless organisms that grow up to become a type of mite. They are found in tall grass and weeds and their bites cause severe itching.

First Aid for chiggers:

- Reduce discomfort and prevent infection
- The affected area should be kept clean by washing with soap and water
- A topical hydrocortisone cream, antihistamine, or local anesthetic may be of value in reducing the itching
- The wounds should not be scratched, if possible
- If signs of infection occur, consult your physician

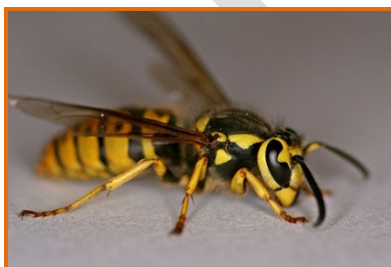

Wasp



Bee

Bees and wasps belong to the phylum Arthropod family, and they are crucially important to the pollination of plants, specifically flowers, fruits, and vegetables. A sting from a bee or wasp will cause itching, irritation, redness and/or swelling at the sting site.

First Aid for bee stings:

- Remove the stinger as quickly as possible - venom continues to enter the skin from the stinger for 45 to 60 seconds following a sting – using a flat dull object, like a credit card. Slide the flat object in the opposite direction of the stinger to remove it from the skin.
- Wash the wound using soap and water
- Apply ice for swelling and pain
- A topical hydrocortisone cream, antihistamine, or local anesthetic may be of value in reducing itching
- If the sting occurs on the neck or mouth, seek medical attention immediately, swelling in these areas may cause suffocation

A small percentage of people are allergic to stings and a sting can be fatal, caused by a disruption to breathing and circulatory systems called anaphylactic shock. If the sting is followed by severe symptoms, seek medical attention immediately. Allergic people should never be alone for outdoor activities since help may be needed for prompt emergency treatment. Allergic people should have an identification bracelet as well as carry something like an “EpiPen” for immediate treatment for anaphylactic shock.



Fire ants are a variety of stinging ants with over 280 species worldwide. Typically, a colony produces large mounds in open areas, and feeds mostly on young plants, seeds, and insects. They nest in the soil, often near moist areas such as river banks and pond edges. Unlike other ants which bite and then spray acid on the wound, fire ants bite only to get a grip and then sting, injecting toxic alkaloid venom. This results in a painful stinging sensation, similar to what a fire burn feels like.

First Aid for fire ant bites:

- Move rapidly away from the nest
- Quickly remove or kill ants on skin and clothing to prevent further stings
- Wash the area gently with soap and water to rid the skin of any venom
- Place cool cloth or ice cloth on sites for 15 minutes, and to relieve pain, dab the area with calamine lotion, a topical (cortisone) or oral antihistamine (e.g. benadryl) to help with swelling
- Do not scratch the blister because this can lead to infection

- Allergic response is rare, but symptoms are difficulty breathing, light headedness, and weakness. Immediate medical attention is required

Snakes serve an important role as predators in the ecosystem, and help maintain populations of rodents and other prey.

First Aid for venomous snake bites:

- Wash and immobilize the injured area, keeping it lower than the heart if possible
- Seek medical attention immediately
- **DO NOT** apply ice, cut the wound, apply a tourniquet, or suck the bite
- Remain calm and try not to move the bitten body part
- Wash the bite with soap and water
- Remove jewelry or other items that may be affected by rapid swelling of affected body parts
- Try to identify the type of snake: note color, size, patterns, and markings
- The bite will be painful and have two distinct puncture wounds
- If venom is injected there will be burning and swelling
- ONLY FOR CORAL SNAKE BITES: apply a mild wrapping on the wound



Water Moccasin (aka cotton mouth)



Rattlesnake



Coral Snake



Copperhead

B12 Poisonous Plants – Plants poison on contact, through ingestion, or by absorption or inhalation. They cause painful skin irritations upon contact and can cause internal poisoning when eaten.



Poison Ivy




Poisonous Sumac



Giant Hogweed



Poison Pacific Oaks

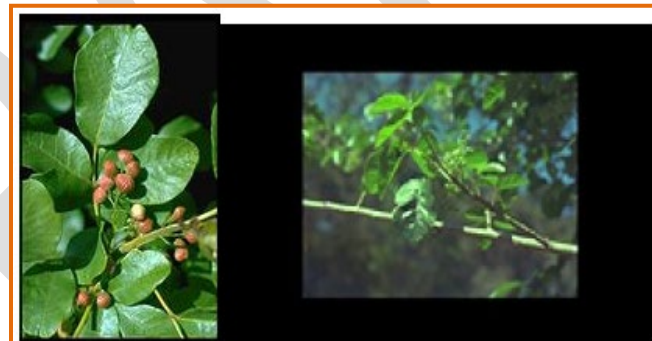

First Aid for poisonous plants:

- Wash exposed areas with cold running water as soon as you can
- When possible, wash your clothing
- Relieve itching by taking cool showers and applying topical anti-itch medications or hydrocortisone
- The rash is often arranged in streaks or lines where you brushed against the plant
- In a few days, the blisters become crusted and take 10 days or longer to heal
- If the reaction is severe or worsens, seek medical attention

B13 Personal Safety - If it is deemed that a work site is in an area where an employee's personal safety may be at risk from potential criminal acts, wild animals, etc. the risks will be

evaluated and implementation of preventative measures will be taken to minimize the risk. Informational resources such as the Client, local law enforcement officials, Park or Wildlife Service, and Animal Control could be utilized to assess the risk and to ensure the safest possible work environment. For example, local law enforcement can be made present or make frequent drive-bys while work is being done, outside security can be hired, and work can occur only during certain times of the day or work may not proceed at all. Some general guidelines are provided here, but each situation is different and actions must be taken based on the specifics of each.

In areas of risk, employees will communicate via cell phones or 2-way radios, and will check-in at predetermined times throughout each workday. If employees do not call in to the Project Manager or designated representative, the team will be contacted, and if unsuccessful, local law enforcement will be notified.

If you see wild animals while driving, stay in your vehicle. Never get out for a photo or a closer look. Keep windows up and don't try to keep the animal from crossing a road with your vehicle. If you see a wild animal while on foot, never approach the animal. If the animal has not seen you, go back the way you came. Do NOT turn your back and run which could evoke their natural predator instinct. Instead, keep facing the animal and back away at a steady pace. Let it know you are human by talking in a low voice and waving your hands slowly. If you are near a car or building, get inside. In addition, in areas of higher risk (i.e., contacted officials have indicated that wild animals are a nuisance), employees may want to consider carrying "pepper spray".

If, while on the project site, and despite any precautions set forth, if an employee feels that their personal safety is at risk, they shall cease work, leave the work area and immediately report their concerns so that appropriate steps can be taken.

B14 Working Alone and Working in Isolated Areas - Site and Operations employees will assess the risk of working alone as outlined in Section 6 in this HASP. And whenever possible, will not work alone in isolated areas. If the isolated area involves hiking/walking into areas that are unmarked or if there is potential to become directionally disoriented (e.g., no trails, unmarked trails, forested or highly vegetated areas), employees will be trained on the use of a compass and trail/topography maps and if necessary, will take wilderness safety training. The employee will work with the Park/Wildlife service on what emergency planning if necessary (e.g., unexpected weather, animal attack, and search/rescue).

Communicating through cell phones or 2-Way Radios will be utilized whenever possible. Employees will check-in at predetermined times throughout each workday and as the risk rating increases, employees will check-in more frequently. If employees do not call in to the Project Manager or designated representative, the team will attempt to be contacted. If contacting the employee is unsuccessful, the appropriate authorities will be notified. In addition, and especially if communication is not possible during the day, the planned start and estimated finish times for the day will be communicated, and employees will check in at the beginning and end of the work day.

If employees will be moving from isolated area to isolated area, there will be established beginning and ending locations, planned start and estimated finish times, and planned routes that will be followed throughout the day. Employees will not deviate from this schedule without first contacting the appropriate personnel. It may also be necessary to notify the Client, law enforcement, or Park/Wildlife officials of these schedules.

Local authorities should be contacted about any hunting season that may be in session, and if it is possible that hunters may be present in the area in which Impact7G personnel will be working. If so, employees will wear brightly colored hardhats/hats and reflective vests, will not work before dusk, and work will end 30 minutes before dusk.

If this is not possible to complete work during daylight hours, employees will wear appropriate reflective apparel and have appropriate lighting, such as portable lighting, flashlights, or headlamps as appropriate for the activity being conducted. Personal security will be assessed and measures taken as discussed above if appropriate.

B15 Severe Weather

Severe weather conditions include high winds, electrical storms, and heavy rain. At a minimum, all work outdoors will cease during these events. When lightning is spotted, site personnel should use the following steps to avoid injury:

- Workers should note the flash-boom ratio (i.e., count the seconds after the lightning was seen until the thunder was heard).
- By counting the seconds between seeing lightning and hearing thunder and dividing by 5, you can estimate your distance from the storm (in miles). If the storm is 6 miles (9.6 kilometers) away or less (30 seconds between when lightning was seen and thunder was heard) workers must stop work and take shelter.
- If the storm is more than 6 miles (9.6 kilometers) away (greater than 30 seconds between lightning and thunder), the site supervisor should monitor the storm and be prepared to cease work if the storm approaches an unsafe distance. Since storms can travel at varying speeds and the amount of time it takes to cease and secure operations will also vary, so prudent judgment should be exercised when storms are in the vicinity and/or developing (e.g., darkening skies, increasing wind speeds, etc).
- Workers should not stay in exposed areas (outdoors on the ground, on a roof, in an aerial lift, on a steel truss, on an ungrounded steel structure, in a golf cart, un-sided building, etc.) after lightning has been witnessed. All personnel must move to a safe location.
- Workers should wait 30 minutes from the last sight of lightning or sound of thunder before returning to work.
- Those required to travel from one building to another during the 30-minute wait time should do so only by enclosed vehicle.
- Once the 30-minute wait time period has elapsed and no additional lightning or thunder has been seen or heard, individuals may resume normal work.

B16 Aboveground and Underground Utilities - Various forms of underground and aboveground utility lines or pipes (carrying water, wastewater, gas, and or electricity) may be encountered during work activities. Every effort shall be made to locate and mark underground utilities prior to the start of intrusive work. At a minimum, Impact7G will conduct a historical site review to develop a plot plan with the most up to date utility information, contact the appropriate One Call service (where available), contract a Private utility locating service (where available), and clear the critical zone around any intrusive location to 5 feet (1.3 m) in every direction. Please reference Section 6 of the site-specific HASP and SPI 27 Subsurface Clearance for more information.

Work involving machinery with high extensions (backhoes, etc.) will remain **at least** 10 feet (3.3 meters) from overhead power lines. As line voltage increases, your safe working distance will also increase. If overhead lines are present, call the utility company and find out what voltage is on the lines so the safe working distance can be calculated, or stay at least 28 feet (9m) from cables supported on wooden poles, and 50 feet (15m) from cables supported on metal poles.

Should any operations cause equipment to come into contact with utility lines, the appropriate authority will be notified immediately and an Incident Report will be completed. Work will be suspended until the appropriate actions for the particular situation can be taken.

B17 Material Handling (Ergonomics) - Proper lifting techniques such as keeping the back straight and legs bent, shall be utilized when lifting equipment. If the equipment cannot be lifted in this manner, it is too heavy to lift alone. Call other personnel, or use a mechanical device for lifting.

B18 Power Tools - Power tools can be hazardous when improperly used since these types of tools use an energy source: Electric, liquid fuel, hydraulic, pneumatic, and powder-actuated. The following precautions will be taken by employees to prevent injury:

- Power tools will always be operated within their design limitations.
- Eye protection, gloves and safety footwear are recommended during operation.
- Store tools in an appropriate dry location when not in use.
- Work only in well illuminated locations.
- Tools will not be carried by the cord or hose.
- Cords or hoses will not be yanked to disconnect it from the receptacle.
- Cords and hoses will be kept away from heat, oils, and sharp edges or any other source that could result in damage.
- Tools will be disconnected when not in use, before servicing, and when changing accessories such as blades, bits and cutters.
- Observers will be kept at a safe distance at all times from the work area.
- Tools will be maintained in a clean manner, and properly maintained in accordance with the manufacturer's guidelines.

- Ensure that proper shoes are worn and that the work area is kept clean to maintain proper footing and good balance.
- Ensure that proper apparel is worn. Loose clothing, ties, or jewelry can become caught in moving parts.
- Tools that are damaged will be removed from service immediately and tagged "Do Not Use".

B19 Vehicle Use – Work areas and site conditions must be considered when designating and selecting a vehicle for use. The vehicle shall be maintained in safe working order as required by the manufacturer. This would include a routine preventive maintenance schedule for servicing and checking of safety-related equipment. Special consideration should be taken when weather conditions reduce the safety and visibility while driving. Appropriate measures should be taken while driving during inclement weather including snow, icy, and/or wet conditions; high winds; hail, heavy rains; debris or other impairments to safe driving caused by natural weather.

B20 Seasonal Hunting Hazards – During recreational hunting seasons, field personnel will wear appropriate clothing, such as fluorescent orange Hi-Vis vests, so as to be visible to hunters and not blend in with the landscape. Field personnel should also use whistles, air horns and/or other means to make their presence known to hunters and wildlife alike. The schedule of the hunting season, if applicable, will be included as an addendum to this HASP in order to inform personnel of the type of game (e.g., deer, pheasant, duck, etc) that is being hunted and the type of weapon being used (e.g., bow & arrow, shotgun, single shot rifle, etc.). Be aware that even if "No Trespassing" and/or "No Hunting Allowed" signs are posted, trespassers and/or hunting may still be on site. At no point should field personnel or contractors confront trespassers.

Appendix C

Subsurface Clearance Field Checklist

DRAFT

Not Applicable

DRAFT

Appendix D **First Aid Guidance**

DRAFT

D1 Purpose

The purpose of this Appendix is to establish the minimum first aid supplies, equipment and actions to properly respond to injuries.

D2 Scope

This program is applicable to all individuals while engaged in work at the project site.

D3 Responsibilities

- It is the responsibility of the Health & Safety Coordinator to ensure that first aid kits are provided and maintained.
- All employees are responsible for using first aid materials in a safe and responsible manner.
- The Health & Safety Director is responsible for corresponding with the Red Cross or an equivalent to keep employee training levels current.

D4 Planning

The Designated Site Supervisor will:

- Ensure that a minimum of one (1) employee, with a valid certificate, shall be present to render first aid at all times work is being performed if medical assistance is not available within 3-4 minutes.
- Ensure that provisions shall have been made prior to commencement of a project for prompt medical attention, including transportation, in case of serious injury.
- Ensure adequate first aid supplies and equipment are easily accessible when required.
- Ensure that in areas where 911 is not available, the telephone numbers of the physicians, hospitals, or ambulances to be used shall be conspicuously posted.

D5 Medical Response

All minor first aid is to be self-rendered. Because of the risks presented by certain bloodborne pathogens, no one is allowed to tend the minor injuries of another.

First aid providers are readily available to assist injured workers. In the absence of an infirmary, clinic, or hospital in near proximity to the workplace, a person or persons shall be available and adequately trained to render first aid.

First aid providers are certified. A person who has a valid certificate in first-aid training from the American Red Cross or equivalent that can be verified by documentary evidence, shall be available at the worksite to render first aid.

Employees authorized to render first aid will always observe universal precautions. (Universal Precautions means that the aid giver treats all bodily fluids as if they were contaminated).

If 911 is not available refer to the list of posted phone numbers for prearranged medical response providers. All Impact7G, Inc. authorized first responders shall have a cell phone as a means of

communications; otherwise handheld radios or telephones shall be used as a means of communication.

D6 Supplies and Equipment

First aid supplies are readily available. First aid supplies shall be easily accessible when required.

All first aid kits contain appropriate items determined to be adequate for the environment in which they are used and if on a construction site are stored in a weatherproof container with individual contents sealed from the manufacturer for each type of item.

First aid kits are inspected to ensure they are adequately stocked. The Health & Safety Coordinator should ensure the availability of adequate first aid supplies, and periodically reassess the demand for supplies and adjust their inventories. For longer duration projects, first aid kits shall be checked before being sent out to each job and at least weekly.

Emergency eyewashing equipment is readily available. Where the eyes or body of any person may be exposed to injurious corrosive materials, suitable facilities shall be provided within the work area.

D7 Transportation of Injured Employees

Services are available to transport injured workers to a health care facility. Proper equipment for prompt transportation of the injured person to a physician or hospital or a communication system for contacting necessary ambulance service shall be provided.

Examples of serious injuries that result in the injured being transported to a medical provider are those resulting in severe blood loss, possible permanent disfigurement, head trauma, spinal injuries, internal injuries and loss of consciousness. Keep in mind that the needs and wellbeing of the injured are the first priority.

Proper equipment for prompt transportation of the injured person to a physician or hospital or a communication system for contacting necessary ambulance service shall be provided.

Choices to consider include: private automobile, company vehicle, helicopter, EMS vehicles including medi-vac helicopters, or any other transportation that can provide safe transportation to the hospital or doctor's office in order to provide medical attention to the injured in the quickest manner without any additional complications or injuries to the injured employee.

Transportation needs must be preplanned and coordinated with the transportation provider prior to an incident requiring such service.

D8 Training

Volunteers or selected employees are trained by the American Red Cross or equivalent in CPR and first aid. Each of these trained and certified employees are equipped with protective gloves and other required supplies.

Appendix E

Emergency Information

DRAFT

Emergency Contact Information

Site Name: *Former YMCA Building*

Specific Location: *480 South 3^d Street, Clinton, Iowa 52732*

Table 1. Emergency Response Telephone Roster

Contact	Name	Office phone #	Mobile phone #
Local Fire Department	Joel Atkinson, Fire Chief	563.242.0125	
Local Hospital	MercyOne	563.244.5555	
Local Police	Kevin Gyrion, Chief of Police	563.243.1455	
Spill Notification	Iowa DNR	515.725-8694	
Impact7G Principal	Mike Fisher	515.473.6256	319.551.1579
Impact7G Project Manager	Jon Reis	515.473.6256	515.231.3719
Impact7G Designated Site Supervisor	Leon Johnson	515.473.6256	515.201.8215
Health and Safety Coordinator	Matt Deutsch	515.473.6256	515.802.7466
Client (ECIA) Contact	Dawn Danielson		563-580-1976
Client (City of Clinton) Contact	Tammy Johnson	563-594-6730	563-212-2394
Contractor:			
(Other):			
Poison Control		800-222-1222	

Potential Chemicals of Concern:

Potential contaminants that may be encountered during site operations include asbestos, lead (from lead-based paint), and mold. There is potential for asbestos fibers and lead in the air above applicable Permissible Exposure Limits (PELs) or Threshold Limit Values (TLVs) during the course of this cleanup project.

Route to Hospital:

Hospital name: *MercyOne Clinton Medical Center*

Hospital Address: *1410 N 4th Street, Clinton, Iowa 52732*

Hospital Phone Number: *1 + 563.244.5555*

Description of Route to Hospital

Describe Route to Hospital with Both Turn by Turn and Google maps:

Work Site Name: *Former YMCA Building*

Work Site Address: *480 South 3^d Street, Clinton, Iowa 52732*

- *Head toward 4th Ave S on S 3^d St. (322 feet)*
- *Turn right onto 4th Ave S. (0.1 mi)*
- *Turn left onto S 2nd Street (US-67) (1.2 mi)*
- *Turn left onto 14th Ave N toward Hospital (0.3)*
- *Turn right (187 feet)*

End: MercyOne Clinton Medical Center is straight ahead.

Example Map: Map Diagram 1: Route to Hospital From Project Site

